

Volume 1, Number 1, June 2010

ISSN 1847-6996



Josip Juraj Strossmayer University of Osijek

ETFOS




FACULTY OF ELECTRICAL ENGINEERING



IJECES

International Journal
of Electrical and Computer
Engineering Systems

International Journal of Electrical and Computer Engineering Systems



INTERNATIONAL JOURNAL OF ELECTRICAL AND COMPUTER ENGINEERING SYSTEMS

Published by Faculty of Electrical Engineering, Josip Juraj Strossmayer University of Osijek, Croatia.

Osijek Croatia | Volume 1, Number 1, June 2010 | Pages 1-59

CONTACT

International Journal of Electrical and Computer Engineering Systems (IJECEES)

Faculty of Electrical Engineering,
Josip Juraj Strossmayer
University of Osijek, Croatia
Kneza Trpimira 2b
31000 Osijek, Croatia
Phone: +38531224600
Fax: +38531224605
e-mail: ijecees@etfos.hr

PUBLISHER

Faculty of Electrical Engineering,
Josip Juraj Strossmayer
University of Osijek, Croatia.

EDITORS-IN-CHIEF

Radoslav Galić

J.J. Strossmayer University of Osijek,
Croatia

Goran Martinović

J.J. Strossmayer University of Osijek,
Croatia

EDITORIAL BOARD

Leo Budin

University of Zagreb, Croatia

Matjaz Colnarič

University of Maribor, Slovenia

Žarko Čučej

University of Maribor, Slovenia

Bojan Čukić

West Virginia University, USA

William A. Gruver

Simon Fraser University, Canada

Željko Hocenski

J.J. Strossmayer University of Osijek,
Croatia

Gordan Ježić

University of Zagreb, Croatia

Dražan Kozak

J.J. Strossmayer University of Osijek,
Croatia

Sven Lončarić

University of Zagreb, Croatia

Tomislav Kilić

University of Split, Croatia

Ivan Maršić

Rutgers, The State University of New
Jersey, USA

Vladimir Mikuličić

University of Zagreb, Croatia

Tomislav Mrčela

J.J. Strossmayer University of Osijek,
Croatia

Srete Nikolovski

J.J. Strossmayer University of Osijek,
Croatia

Davor Pavuna

Ecole Polytechnique Fédérale de
Lausanne, Switzerland

Nedjeljko Perić

University of Zagreb, Croatia

Marjan Popov

Delft University, The Netherlands

Sasikumar Punnekkat

Mälardalen University, Sweden

Snježana Rimac-Drlje

J.J. Strossmayer University of Osijek,
Croatia

Imre Rudas

Budapest Tech, Hungary

Ivan Samardžić

J.J. Strossmayer University of Osijek,
Croatia

Cristina Seceleanu

Mälardalen University, Sweden

Siniša Srblić

University of Zagreb, Croatia

Zdenko Šimić

University of Zagreb, Croatia

Damir Šljivac

J.J. Strossmayer University of Osijek,
Croatia

Tomislav Švedek

J.J. Strossmayer University of Osijek,
Croatia

Domen Verber

University of Maribor, Slovenia

Dean Vučinić

Vrije Universiteit Brussel, Belgium

Joachim Weickert

Saarland University, Germany

Martin Welk

Saarland University, Germany

Drago Žagar

J.J. Strossmayer University of Osijek,
Croatia

Proofreader

Ivanka Ferčec

J.J. Strossmayer University of Osijek,
Croatia

Computer typesetting and screan break

Davor Vrandečić

J.J. Strossmayer University of Osijek,
Croatia

Print:

Grafika d.o.o.
Grafičko nakladnička djelatnost
Strossmayerova 295, 31000 Osijek
Tel: 031/310-300
Tel/Fax: 031/310-303

All papers published in journal have been reviewed

Journal is refferd in:

to be announced

Bibliographic Information

Commenced in 2010.
ISSN: 1847-6996
e-ISSN: 1847-7003
Published: semiannually
Circulation: 300

Copyright

Authors of the International Journal
of Electrical and Computer Engineering
Systems must transfer copyright to the
publisher in written form.

Subscription Information

The annual subscription rate is 50€
for individuals, 25€ for students and
150€ for libraries.

Subscription receives:

Faculty of Electrical Engineering,
Josip Juraj Strossmayer
University of Osijek, Croatia.
Kneza Trpimira 2b
31000 Osijek, Croatia
Giro-account: 2390001 -1100016777,
Croatian Postal Bank

TABLE OF CONTENTS

EDITORIAL BOARD	2
EDITORIAL PREFACE	4
Integrodifferential Equations for Multiscale Wavelet Shrinkage: The Discrete Case	5
Stephan Didas Gabriele Steidl Joachim Weickert	
Advanced Scientific Visualization, a Multidisciplinary Technology Based on Engineering and Computer Science.....	23
Dean Vučinić	
Radiation Pattern of Waveguide Antenna Arrays on Spherical Surface - Experimental Results.....	35
Slavko Rupčić Vanja Mandrić Davor Vinko	
WSN Implementation in the Greenhouse Environment Using Mobile Measuring Station.....	41
Simon János Goran Martinović István Matijevics	
Power Loss Minimizing Control of Cascaded Multilevel Inverter with Efficient Hybrid Carrier Based Space Vector Modulation.....	49
Chinnathambi Govindaraju Kaliaperumal Baskaran	
About this Journal	58
IJECES Copyright Transfer Form	60

WSN Implementation in the Greenhouse Environment Using Mobile Measuring Station

Simon János

Subotica Tech, Department of Informatics
simon@vts.su.ac.rs

Goran Martinović

Faculty of Electrical Engineering, J.J. Strossmayer University of Osijek
goran.martinovic@etfos.hr

István Matijevics

University of Szeged, Department of Informatics
mistvan@inf.u-szeged.hu

Abstract – Continuous advancements in wireless technology and miniaturization have made the deployment of sensor networks to monitor various aspects of the environment increasingly flexible. The function of a greenhouse is to create the optimal growing conditions for the full life of the plants. Using autonomous measuring systems helps to monitor all the necessary parameters for creating the optimal environment in the greenhouse. The robot equipped with sensors is capable of driving to the end and back along crop rows inside the greenhouse. This paper deals with the implementation of mobile measuring station in greenhouse environment. It introduces a wireless sensor network that was used for the purpose of measuring and controlling the greenhouse application.

Keywords – WSN, Sun SPOT, embedded system, PIC, mobile robot, greenhouse

1. INTRODUCTION

Mobile robotics is a young field of research. Its roots include many engineering and science disciplines, from mechanical, electrical and electronics engineering to computer, cognitive and social sciences. The Board Of Education is a complete, low-cost development platform equipped with the needed sensors for humidity, temperature, light, etc. As shown in Figure 1, the Boe-Bot is a great tool with which to get started with robotics.

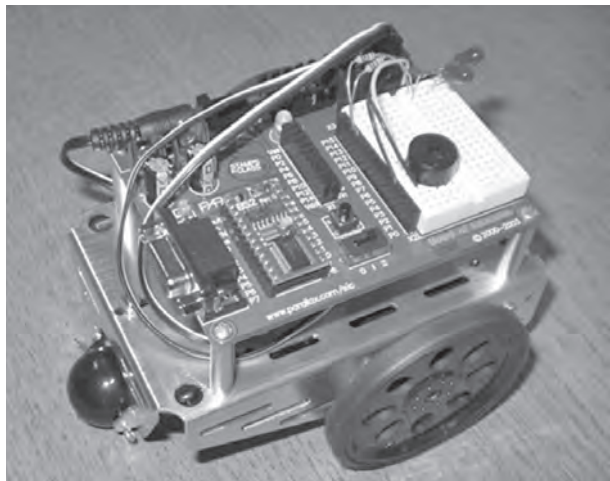


Fig. 1. Assembled Boe-Bot

The SunSPOT WSN module makes it possible for the Boe-Bot robot's BASIC Stamp 2 microcontroller brain to communicate wirelessly with a web based user interface running on a nearby PC. The BASIC Stamp microcontroller runs a small PBASIC program that controls the Boe-Bot robot's servos and optionally monitors sensors while it communicates wirelessly with the web server.

2. CONTROL SCHEME FOR MOBILE ROBOTS

A mobile robot needs locomotion mechanisms that enable it to move throughout its known or unknown environment. But there are a large variety of possible ways to move, and so the selection of a robot's approach to locomotion is an important aspect of mobile robot design. Figure 2, presents the control scheme for mobile robot systems. In the laboratory, there are research robots that can walk, jump, run, slide, skate, swim, fly, and, of course, roll. Any of these activities has its own control algorithm [16].

Locomotion is the complement of manipulation. In manipulation, the robot arm is fixed but moves objects in the workspace by imparting force to them. In locomotion, the environment is fixed and the robot moves by imparting force to the environment. In both cases, the scientific basis is the study of actuators that gen-

erate interaction forces, and mechanisms that implement desired kinematical and dynamic properties. The wheel has been by far the most popular mechanism in mobile robotics and in man-made vehicles in general. It can achieve very good efficiencies, and does so with a relatively simple mechanical implementation. In Figure 3, the kinematics of the mobile robot is depicted. In addition, balance is not usually a research problem in wheeled robot designs, because wheeled robots are almost always designed so that all wheels are in ground contact at all times [15].

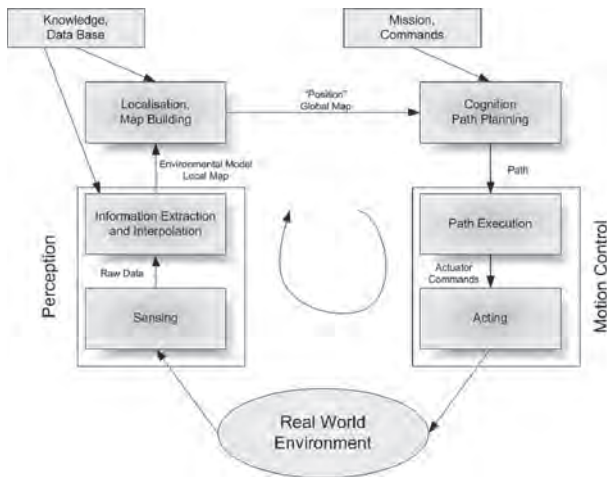


Fig. 2. Reference control scheme for mobile robot systems

Thus, three wheels are sufficient to guarantee stable balance, although, as we shall see below, two-wheeled robots can also be stable [12]. When more than three wheels are used, a suspension system is required to allow all wheels to maintain ground contact when the robot encounters uneven terrain. Motion control might not be an easy task for this kind of systems. However, it has been studied by various research groups, and some adequate solutions for motion control of a mobile robot system are available [16].

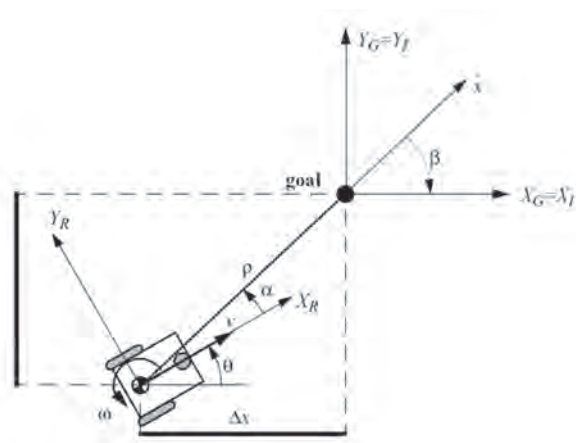


Fig. 3. Robot kinematics and its frames of interests

3. WSN AND EVENT-BASED SYSTEM FOR GREENHOUSE CLIMATE CONTROL

A wireless sensor network (WSN) is a computer network consisting of spatially distributed autonomous devices using sensors to cooperatively monitor physical or environmental conditions, such as temperature, sound, vibration, pressure, motion or pollutants, at different locations [1]. The development of wireless sensor networks was originally motivated by military applications such as battlefield surveillance. Figure 4, presents the sensor node architecture. However, wireless sensor networks are now used in many civilian application areas, including environment and habitat monitoring, health-care applications, home automation, and traffic control.

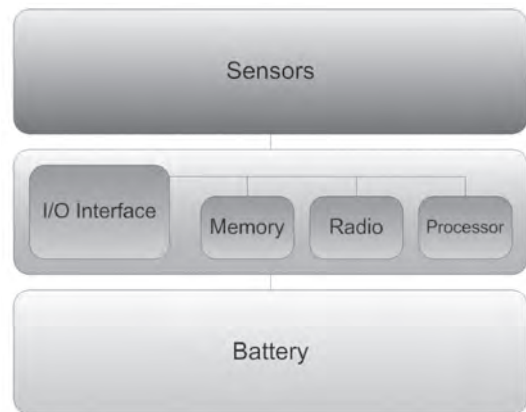


Fig. 4. Sensor Node Architecture

In addition to one or more sensors, each node in a sensor network is typically equipped with a radio transceiver or other wireless communications device, a small microcontroller, and an energy source, usually a battery. Figure 5 shows the typical wireless sensor network.

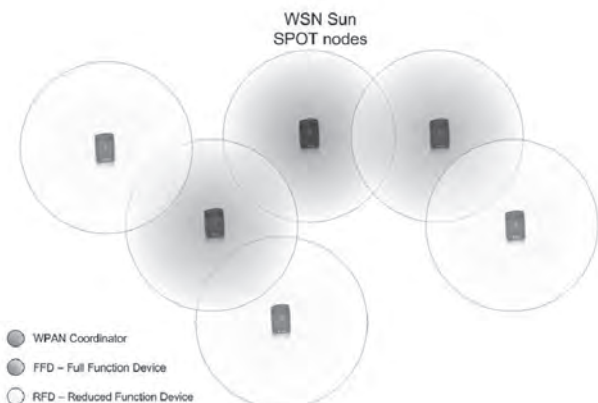


Fig. 5. Typical wireless sensor network (WSN)

The size a single sensor node can vary from shoebox-sized nodes down to devices the size of grain of dust [2]. The cost of sensor nodes is similarly variable, ranging

from hundreds of dollars to a few cents, depending on the size of the sensor network and the complexity required of individual sensor nodes. Size and cost constraints on sensor nodes result in corresponding constraints on resources such as energy, memory, computational speed and bandwidth. In computer science, wireless sensor networks are an active research area with numerous workshops and conferences arranged each year [4].

As commented above, this paper is devoted to analyzing diurnal and nocturnal temperature control with natural ventilation and heating systems, and humidity control as a secondary control objective. Under diurnal conditions, the controlled variable is the inside temperature and the control signal is the vent opening. The use of natural ventilation produces an exchange between the inside and outside air, usually provoking a decrease in the inside temperature of the greenhouse. The controller must calculate the necessary vent opening to reach the desired setpoint. The commonest controller used is a gain scheduling PI scheme where the controller parameters are changed based on some disturbances: outside temperature and wind speed. In the case of nocturnal temperature control, forced-air heaters are used to increase the inside temperature and an on/off control with dead/zone was selected as heating controller.

Nowadays, commercial systems present more flexibility in the implementation of control algorithms and sampling techniques, especially WSN, where each node of the network can be programmed with a different sampling algorithm or local control algorithm with the main goal of optimizing the overall performance.

4. SOLUTION

Building and programming a robot is a combination of mechanics, electronics, and problem solving. What you're about to learn while doing the activities and projects in this text will be relevant to "real world" applications that use robotic control, the only difference being the size and sophistication. Robotics has come a long way, especially for mobile robots. In the past, mobile robots were controlled by heavy, large, and expensive computer systems that could not be carried and had to be linked via cable or wireless devices. As shown in Figure 8, the mobile measuring station is navigating inside the greenhouse. Today, however, we can build small mobile robots with numerous actuators and sensors that are controlled by inexpensive, small, and light embedded computer systems that are carried on-board the robot.



Fig. 6. Humidity control

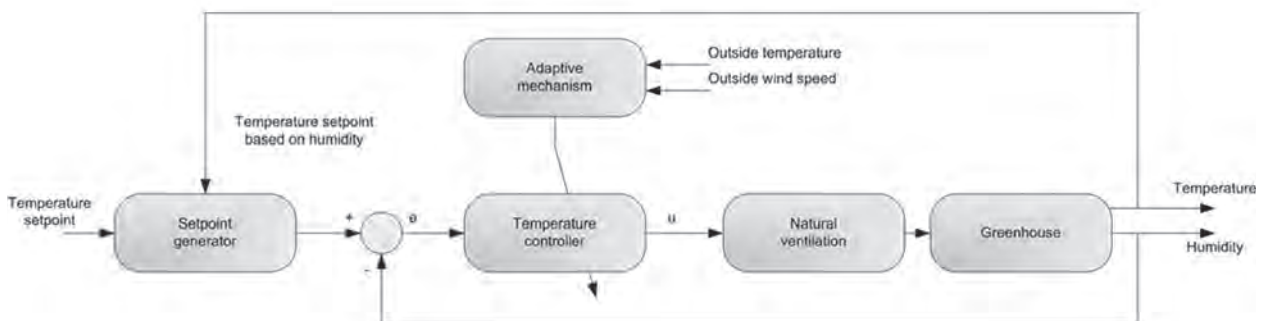


Fig. 7. Temperature controller

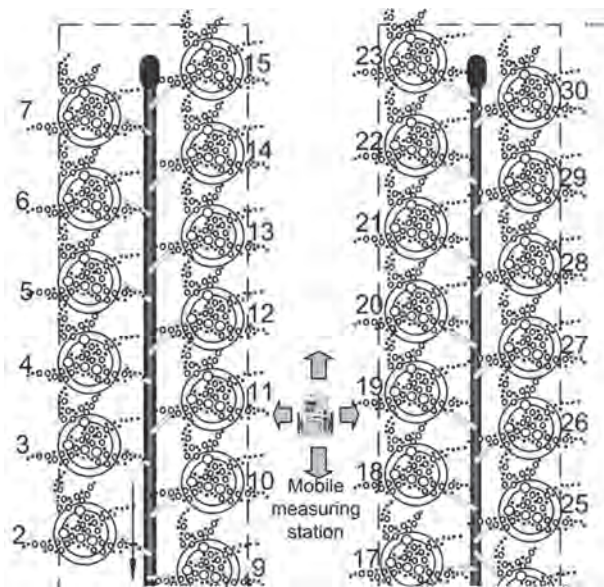


Fig. 8. Greenhouse top view with the mobile measuring station

The mechanical principles, example program listings, and circuits you will use are very similar to, and sometimes the same as, industrial applications developed by engineers. In this project we have used SunSPOT-s to achieve remote control over a Boe-Bot. For this project we have used 2 SunSPOT-s from the kit (free range and base station module) as depicted in Figure 9. SunSPOT's wireless protocol is Zigbee based protocol [6].

The Hardware basically centers around Sun SPOT and DC Motors controlled by Basic Stamp. The Sun SPOT base station will send data to Sun SPOT on the mobile measuring station which will drive the Basic Stamp controller to DC IO pins [7]. The microcontroller will drive the Motors which will run the measuring station. Figure 10 shows the testing phase of the mobile measuring station.

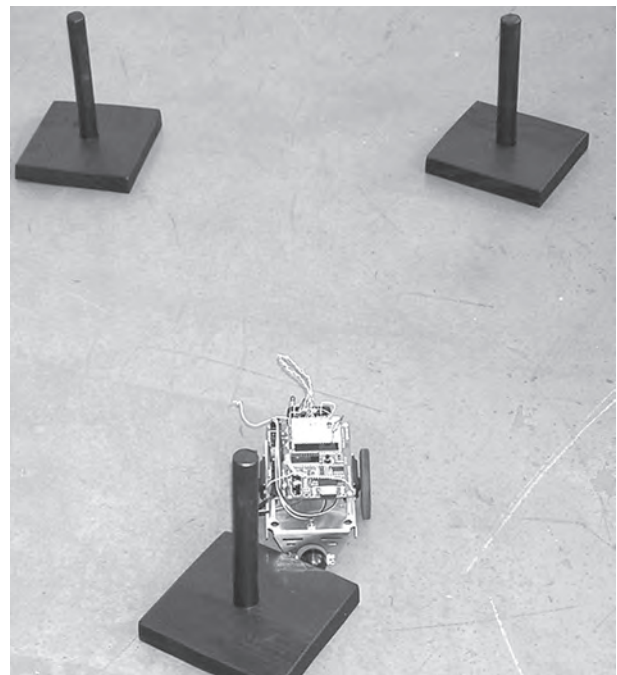


Fig. 10. Boe-bot with SunSPOT mounted

5. EXPERIMENTAL RESULTS

The applications for WSNs are many and varied. They are used in commercial and industrial applications to monitor data that would be difficult or expensive to monitor using wired sensors. They could be deployed in wilderness areas, where they would remain for many years (monitoring some environmental variable) without the need to recharge/replace their power supplies. They could form a perimeter about a property and monitor the progression of intruders (passing information from one node to the next). There are a many uses for WSNs [8].

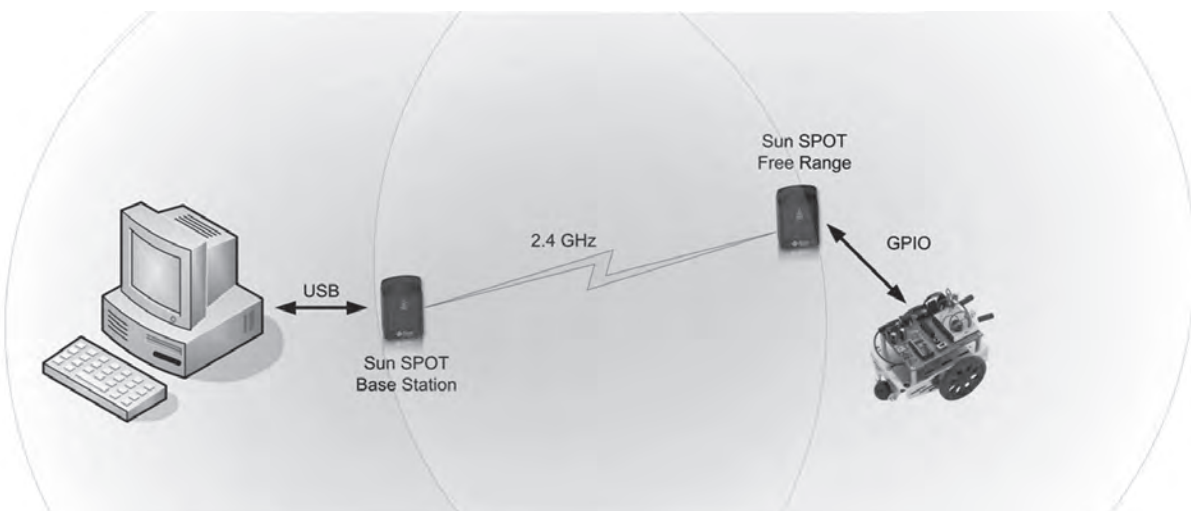


Fig. 9. Connection of the system



Fig. 11. Crops in greenhouse

Typical applications of WSNs include monitoring, tracking, and controlling. Some of the specific applications are habitat monitoring, object tracking, nuclear reactor controlling, fire detection, traffic monitoring, etc. In a typical application, a WSN is scattered in a region where it is meant to collect data through its sensor node. Figure 12 shows the complete control system of the greenhouse. The WSN-based controller has allowed a considerable decrease in the number of changes in the control action and made possible a study of the compromise between quantity of transmission and control performance.

The limit of the level crossing sampling has presented a great influence on the event based control performance where, for the greenhouse climate control problem, the system has provided promising results.



Fig. 11. Capsicum

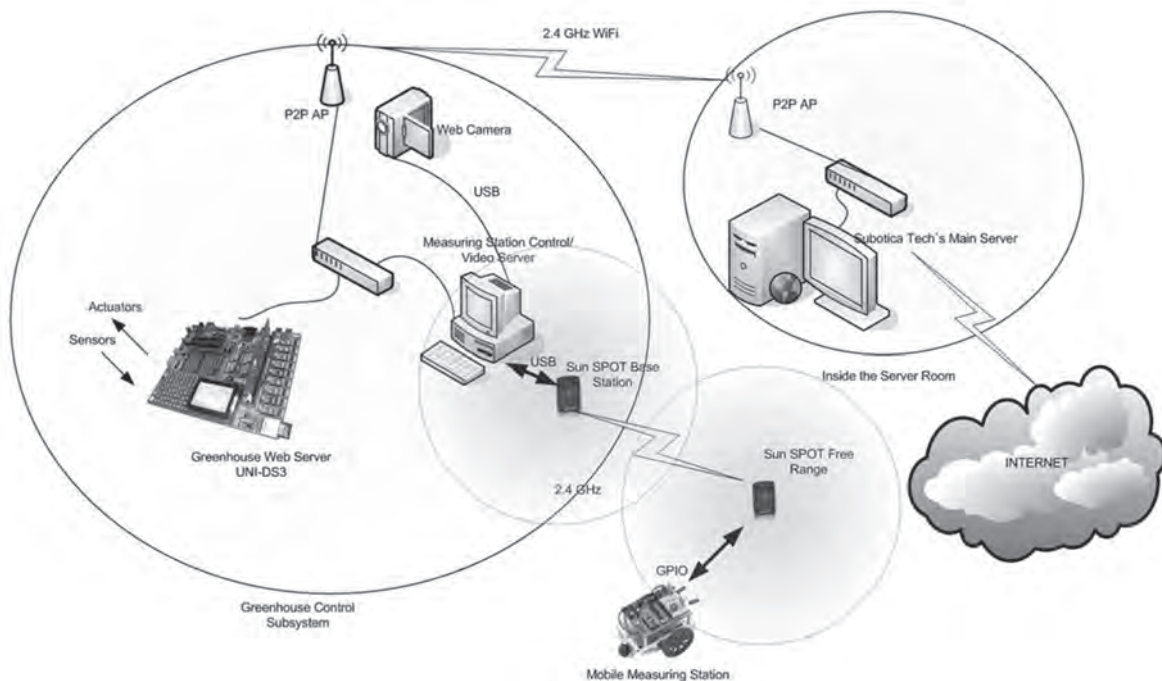


Fig. 12. Greenhouse control system

Motion control of mobile robots is a very important research field today, because mobile robots are a very interesting subject both in scientific research and practical applications. In this paper the object of the remote control is the Boe-Bot. The vehicle has two driving wheels and the angular velocities of the two wheels

are independently controlled [9]. When the vehicle is moving towards the target and the sensors detect an obstacle, an avoiding strategy is necessary. The host system connects to the mobile robot with the SunSPOT module. A remote control program has been implemented as shown in Figure 14.

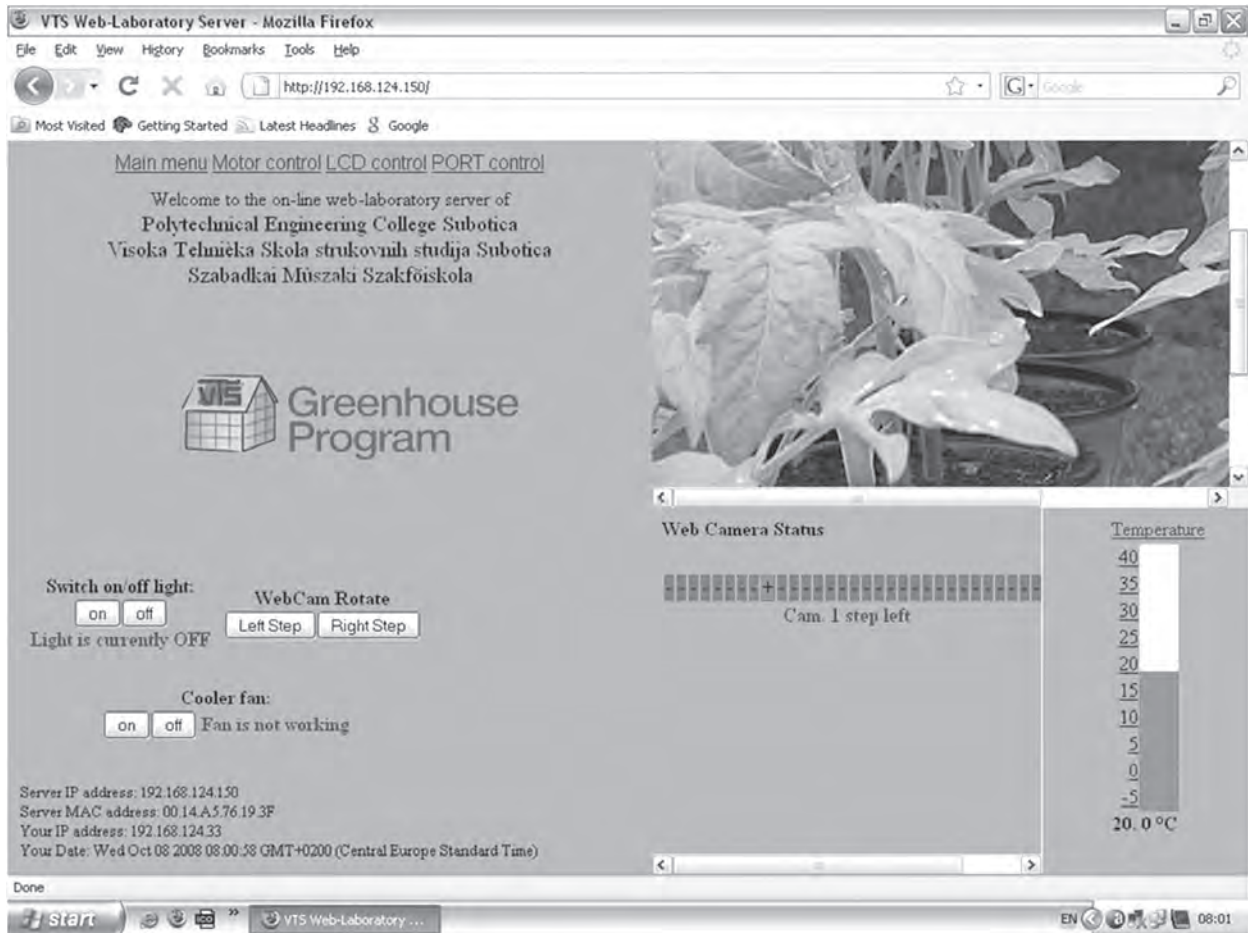


Fig. 14. Screenshot of the system

The code snippet below gives an example of testing the communication devices in broadcast mode as we can see in Figure 15. It is written in Java and runs on SunSPOT modules. Each SPOT is assigned its own address and can broadcast or unicast to the other SPOTS. This code is implemented for testing purposes only.

The Sun SPOT is a Java programmable embedded device designed for flexibility. The basic unit includes accelerometer, temperature and light sensors, radio transmitter, eight multicolored LEDs, 2 push-button control switches, 5 digital I/O pins, 6 analog inputs, 4 digital outputs, and a rechargeable battery. Java imple-

```
protected void startApp() throws MIDletStateChangeException {
    System.out.println("Broadcast Counter MIDlet");
    //showColor(color);
    //switches[0].addISwitchListener(this);
    //switches[1].addISwitchListener(this);
    try {
        tx = (RadiogramConnection)Connector.open("radiogram://broadcast:123");
        xdg = (Radiogram)tx.newDatagram(20); //transmitting the radiogram
        RadiogramConnection rx = (RadiogramConnection)Connector.
open("radiogram://:123");
        Radiogram rdg = (Radiogram)rx.newDatagram(20);
        //outs[0].setHigh();
        while (true) {
            try {
                rx.receive(rdg);
```

```

        int cmd = rdg.readInt();
        //int newCount = rdg.readInt();
        //int newColor = rdg.readInt();
        /*if (cmd == CHANGE_COLOR) {
            System.out.println("Received packet from " + rdg.getAddress());
            //showColor(newColor);
        } else {
            //showCount(newCount, newColor);
        }*/
        switch (cmd){
            case 0: outs[demo.H0].setLow(); outs[demo.H1].setLow(); leds[0].
setRGB(200, 0, 0); leds[0].setOn(); leds[1].setOff();leds[2].setOff();leds[3].setOff();
break;

            case 4: outs[demo.H0].setHigh(); outs[demo.H1].setLow(); leds[1].
setRGB(200, 0, 0); leds[1].setOn(); leds[0].setOff();leds[2].setOff();leds[3].setOff();
break;

            case 3: outs[demo.H0].setLow(); outs[demo.H1].setHigh(); leds[2].
setRGB(200, 0, 0); leds[2].setOn(); leds[1].setOff();leds[0].setOff();leds[3].setOff();
break;

            case 1: outs[demo.H0].setHigh(); outs[demo.H1].setHigh(); leds[3].
setRGB(200, 0, 0); leds[3].setOn(); leds[1].setOff();leds[2].setOff();leds[0].setOff();
break;
//setting up the diagnostic leds
            default: leds[4].setRGB(200, 0, 0); leds[4].setOn(); break;
        }
    } catch (IOException ex) {
        System.out.println("Error receiving packet: " + ex);
        ex.printStackTrace(); // Error detection
    }
}
} catch (IOException ex) {
    System.out.println("Error opening connections: " + ex);
    ex.printStackTrace(); // Error detection
}
}
}

```

Fig. 15. Sending broadcast packets via WSN from base station

mentation and programming the Sun SPOT is surprisingly easy. Experimental testing has demonstrated the validity of our approach.

6. COMPARISON OF THE FRUIT PRODUCTION

Tomatoes are a warm season vegetable crop. They grow best under conditions of high light and warm temperatures. Low light in a fall or winter greenhouse, when it is less than 15% of summer light levels, greatly reduces fruit yield when heating costs are highest. For this reason, it is difficult to recommend that a greenhouse operator should grow and harvest fruit from December 15 to February 15. Based on few years of experience, tomato production is most successful in the spring. Excellent light, moderate heating costs and good prices annually demonstrate this is the best time for greenhouse tomato production. Tomato plants grow best when the night temperature is maintained at 16 - 18 °C. Temperatures below 16 °C will prevent normal pollination and fruit development. In warm or hot outdoor conditions, tomato greenhouses must be ventilated to keep temperatures below 35 °C. High temperatures not only affect the leaves and fruit, but increased soil temperatures also reduce root growth. Table 1 gives an overview of effectiveness of the control system.

Table 1. The average total weight and number of fruit harvested

Tested plants	Average weight of fruit (with WSN control)	Average weight of fruit (without WSN control)	Average number of fruit per plant (with WSN control)	Average number of fruit per plant (without WSN control)
Tomato	210 g	180 g	17	11
Capsicum	135 g	110 g	15	12
Cucumber	70 g	60 g	13	10

Success in greenhouse plants depends completely on fruit yield. Yields of 20 – 25 % gain per plant are very good for annual costs.

7. CONCLUSION

The system and its implementation have been successful; however there are still possibilities for further development. The first cycle of plant development has just passed, and it has provided numerous valuable data. For the next cycle better conditions will be provided, with more experienced staff. With further developments the application of professional industrial electronics will also have to be taken into consideration, which would significantly decrease possible problems.

ACKNOWLEDGEMENTS

This research was partially supported by the TAMOP-4.2.2/08/2008-0008 program of the Hungarian National Development Agency.

REFERENCES

- [1] Sun Microsystems Inc., "Sun™ Small Programmable Object Technology (Sun SPOT)" Owner's Manual Release 3.0, 2007
- [2] Sun Microsystems Inc., "Sun Spot Developer's Guide", 2005
- [3] Sun Microsystems Inc., "Demo Sensor Board Library", 2005
- [4] S. Scaglia, "The Embedded Internet", 2008
- [5] J. Gosling, "The Java™ Language Specification" Third Edition, 2005
- [6] I. Matijevics, J. Simon, „Advantages of Remote Greenhouse Laboratory for Distant Monitoring", Proceedings of the Conference ICoSTAF 2008, pp 1-5, Szeged, Hungary, 2008
- [7] J. Simon, I. Matijevics, "Distant Monitoring And Control For Greenhouse Systems Via Internet", Zbornik radova konferencije Yuinfo 2009, pp. 1-3, Kopaonik, Srbija, 2009
- [8] I. Matijevics, J. Simon, "Comparison of various wireless sensor networks and their implementation", Proceedings of the Conference SIP 2009, pp 1-3, Pécs, Hungary, 2009
- [9] A. Pawlowski, J. Luis Guzman, F. Rodríguez, M. Berenguel, J. Sánchez and S. Dormido "Simulation of Greenhouse Climate Monitoring and Control with Wireless Sensor Network and Event-Based Control" Proceedings of the Conference ,2009
- [10] L. Gonda, C. Cugnasca, "A proposal of greenhouse control using wireless sensor networks" In Proceedings of 4thWorld Congress Conference on Computers in Agriculture and Natural Resources, Orlando, Florida, USA, 2006
- [11] X. Feng, T. Yu-Chu, S. Yanjun, S. Youxian "Wireless Sensor/ Actuator Network Design for Mobile Control Applications. Sensors", Proceedings of the Conference, 2007
- [12] Roland Siegwart and Illah R., "Introduction to Autonomous Mobile Robots", Nourbakhsh, 2004
- [13] J. Vasu, L. Shahram, "Comprehensive Study of Routing Management in Wireless Sensor Networks- Part-1", 2008
- [14] J. Simon, G. Martinović, "Web Based Distant Monitoring and Control for Greenhouse Systems Using the Sun SPOT Modules", Proceedings of the Conference SISY 2009, pp. 1-5, Subotica, Serbia, 2009
- [15] Gy. Mester, "Wireless Sensor-based Control of Mobile Robot Motion", Proceeding of the IEEE SISY 2009, pp 81-84, Subotica, Serbia 2009
- [16] Gy. Mester, "Intelligent Wheeled Mobile Robot Navigation", Proceedings of the Conference Európai Kihívások V, pp. 1-5, SZTE, Szeged, Hungary, 2009
- [17] P. Kucsera, „Sensors For Mobile Robot Systems" , Academic and Applied Research in Military Science, Volume 5, Issue 4, p.645-658,Hungary, 2006
- [18] P. Kucsera, "Industrial Component-based Sample Mobile Robot System" , Acta Polytechnica Hungarica, Volume 4 Issue 4 Number 4, Hungary, 2006