# PROCEEDINGS

of the 1<sup>st</sup> Regional Conference -Mechatronics in Practice and Education (MECH-CONF 2011)

> December 08 – 10, 2011 Subotica, Serbia

> > Organised by:

Subotica Tech, College of Applied Sciences

in co-operation with

### Kecskemét College, Hungary

Provincial Secretariat for Education, Administration and National Communitties

#### Editors:

Zoran Anišić & Stevan Stankovski

Published by:

Subotica Tech, College of Applied Sciences

Co-financed by the European Union through the Hungary – Serbia IPA – Cross-border Co-operation Programme 1<sup>st</sup> Regional Conference - Mechatronics in Practice and Education MECH - CONF 2011

# TABLE OF CONTENT

page

# **INVITED PAPERS**

1.	The Success of MECHEDU IPA Cross-border Cooperation Program Tóth, Ákos	1
2.	Optimizing learning outcome by implementing an ECTS barometer Titanilla Komenda, Viktorio Malisa	5
3.	The algorithm for developing a competitive engineering curriculum of Mechatronics professional studies V. Mladenović, D. Šešlija	11
4.	Design and Construction of Mechatronic Systems for Educational Purposes Stevan Stankovski, Gordana Ostojic	21
5.	Develop Virtual Joint Laboratory for Robotics in Production Tihomir Latinović, Sorin Deaconu, Milosav Đurđević	. 29
6.	E-Learning Practice in Performing the Laboratory Works Specific to the Pneumatic Drives ALEXA Vasile, KISS Imre, RATIU Sorin Aurel, CIOATA Vasile George	. 34
7.	Learning outcomes at the course Mechatronics Tomislav Baškarić, Todor Ergić, Dražan Kozak, Darko Damjanović	. 38

## **CONFERENCE PAPERS**

1.	Control of Drives for Flying shear using DSP microcontroller Milan Adžić, Gábor Biacs
2.	Study of the mechanical properties of die forged aluminium alloys Csaba Árvay, István Oldal, Attila Csatár, Zoltán Szakál
3.	Analysis of the turned profile roughness based on wavelength technology István BARÁNYI, Gábor KALÁCSKA, Árpád CZIFRA, Zoltán SZAKÁL
4.	Kinetic and Static Analysis at Loaded Running of Mechanisms of Parallel Gang Shears' Type Assigned for Cutting the Metallurgical Products Adina BUDIUL BERGHIAN, Teodor VASIU
5.	DSP Microcontroller Control Solution for Rolling Machines Gábor Biacs, Milan Adžić
6.	Black Magic; The Present and theFutureApplication of CarbonFibers Endre Borbély, Rudolf Szabó
7.	Considerations Regarding the Connection of Romanian Universities with the European Community Higher Education Bordeasu Ilare, Popoviciu Mircea Octavian

i

117	1 <sup>st</sup> Regional Conference - Mechatronics in Practice and Education MECH - CONF 2011
8.	Fuzzy System Modeling – Practical Approach Vladimir Brtka, Eleonora Brtka, Visnja Ognjenovic, Ivana Berkovic
9.	Some Considerations Regarding the Semi-solid Processing – Study about a New Variant of the Rheo-casting Method
	CIOATA Vasile George, KISS Imre, ALEXA Vasile
10.	Process Planning in Developed Knowledge Database Predrag COSIC, Dragutin LISJAK, Diana MILCIC
11.	Design and Implementation of an Electronic Market Research System Zlatko Čović, Aleksandar Pejić, Bojan Pejić, Robert Bašić
12.	One Solution of Integrated Learning System Zlatko Čović, Miodrag Ivković, Tibor Szakáll, Biljana Radulović
13.	Adapting Electroencephalogram Data for MATLAB/Simulink Sándor Csikós, József Sárosi, Roland Elek, István Bíró
14.	Size and shape accuracy of layer by layer 3D printing G. Dezső, A. Százvai, P. Kósa
15.	Modelling contact problem of machining with twist drill Gergely Dezső, Ferenc Szigeti, Gyula Varga
16.	Modelling with Backpropagation Algorithm D. R. Drndarevic, M. Milivojevic
17.	Comparing a two approaches of Hard Real-Time Industrial Ethernet protocols Istvan Ferenczi
18.	Turning ZrO <sub>2</sub> ceramics Gellért Fledrich, István Pálinkás, Róbert Keresztes
19.	Electrorheologial properties of TiO <sub>2</sub> /mineral oil suspensions under flow mode Laszlo Foldi, Laszlo Janosi
20.	Application of a Mechatronical Structure in Agriculture I. Fürstner, P. Szilveszter, L. Gogolak, P. Bosznai
21.	Type-2 fuzzy adaptive particle swarm optimization         V. Galzina, R. Lujić
22.	Re-establishing HMI and control system of facility for alcohol fermentation      V. Galzina , R. Lujić, T.Šarić
23.	Quality management methods to improve production processes Adrienn Goda, Attila Lajos, László Zsida
24.	Manufacturing shop control integration: a concept and an example Danijela Gračanin, Branislav Stevanov, Nemanja Sremčev, Zdravko Tešić
25.	Design and Optimization of Fine Structure of High Quality Surfaces György Gyurecz, Gábor Renner, Sándor Horváth

η

ii

1	1 <sup>st</sup> Regional Conference - Mechatronics in Practice and Education MECH - CONF 2011	
26.	Composite alternative vehicle with solar equipment I. E. Haber, N. Novak	192
27.	Dynamic Social Network Analysis – a review of the latest methods I. Hamulic, N. Bijedic, D. Radosav, E. Junu, Lj. Djuretanovic	200
28.	Physical simulation of two-dimensional chips formation Gergely Dezső, János Herman	205
29.	Mutation Testing: Program-Based Mutation Z. Ivankovic, B. Markoski, P. Pecev, M. Ivkovic, I. Berkovic	211
30.	Case study of PMBOK methodology for research and development IT projects Vesna Jevtic, Dalibor Dobrilovic, Zeljko Stojanov, Jelena Stojanov	218
31.	Control of distributed devices on PROFIBUS network Gábor Kátai-Urbán, Iván Lajtai	222
32.	Industrial and Laboratory Approaches for Quality Assurance in the Rolling-Mill Rolls Manufacturing <i>KISS Imre, ALEXA Vasile, CIOATA Vasile George, RATIU Sorin Aurel</i>	226
33.	Novel Applications of YBCO Loops Janos Kosa	
34.	Braitenberg's Robots in Education and for Research Z. Kunica, T. Štampar, S. Bukal, D. Zorc	
35.	Some Examples of Remote Laboratories for Mechatronics S. Maravić Čisar, L. Szedmina, R. Pinter, I. Fürstner	244
36.	Development of Cleaning-disinfection Appliances Used in Healthcare in the Frame of Modern Approach in Engineer's Education Vojislav Miltenović, Milan Banić, Aleksandar Miltenović	249
37.	Application of laser measuring systems for testing the geometric accuracy of machine tools <i>Cvijetin Mlađenović, Milan Zeljković, Slobodan Tabaković, Miodrag Hadžistević</i>	
38.	Electrical impedance tomography – Lock in Amplifier Péter Odry, Ferenc Henézi, Ervin Burkus, Attila Halász, István Kecskés, Robert Márki, Bojan Kuljić, Tibor Szakáll, Kálmán Máthé	264
39.	Synthesis of Short Decision Rules by Analysis of the Robot Movements - Rough Set Approach Visnja Ognjenovic, Eleonora Brtka, Vladimir Brtka, Ivana Berkovic	272
40.	Applying the Bureaucratic Organization in the Reorganization Process Eva Pataki, Andras Sagi, Srećko Novaković	
41.	Special Worm Gear Pairs with Internal Worm PAY Gábor László, PAY Eugen	286
42.	The protection of commercial licensed utility software from an unauthorized usage Predrag Pecev, Zdravko Ivankovic, Vladimir Beravs, Petar Vasiljevic, Zoran Milosevic	293

iii

1	1 <sup>st</sup> Regional Conference - Mechatronics in Practice and Education MECH - CONF	5 2011
43.	. Implementation of Genetic Algorithm as the Part of Dicrete Simulation in Standard Streams and a show	
	in Production Planning	
	Davor PIROVIC, Mihael GUDLIN, Predrag COSIC	
44.	. Accessability of City Administration's Portal in Accordance With EU Regulations	
	Dragica Radosav, Dijana Karuović, Branka Dobranić, Vladimir Karuović	
45.	. Development Laboratory of Mechatronics and Students Contribution	
	Milorad Rancic, Veselin Mulic	
16	. Virtual Didactic Laboratory for the Interactive Study of an Internal	
40.	Combustion Engine Management System	
	RATIU Sorin Aurel, ALEXA Vasile, KISS Imre, JOSAN Ana	
47.	. The impacts of mechanical pre-treatment of metal armatures on the	
	strength of the rubber-to-metal bonding	
	Tamás Renner, Lajos Pék	
48	Precision mechatronical system for molecular beam control	
	I. Réti, B. Plósz, G. Bátori, P. Kucsera, G.V. Tényi, S. Gruber, Á. Nemcsics	
	Wheeler Galler Carlos Carlos and a compared with feature and the Lot with a loss of the second second	
49.	. Electro-mechanical problems related to the out-heating of the vacuum	
	chambers of the molecular beam epitaxy	
	I. Réti, G.V. Tényi, B. Kupás-Deák, P. Kucsera, G. Bátori, A. Mieville, S. Gruber	
50	Precision-mechanical, vacuumtechnical and electronical problems in	
50.	the installation of a molecular beam epitaxial equipment	
	I. Réti, P. Harmat, G.V. Tényi, L. Tóth, P. Kucsera, G. Bátori, F. Pruzsina	
51.	Neuro-fuzzy Systems for Patient Treatments	
	Andor Sagi, Anita Sabo, Bojan Kuljić, Tibor Szakáll	
52	Researching New Behavior Trends in Existing Market Models	
52.	Andras Sagi, Eva Pataki	
53.	Accurate Positioning of Spring Returned Pneumatic Artificial Muscle	
	Using Sliding-mode Control	
	József Sárosi, Sándor Csikós, István Asztalos, János Gyeviki, Antal Véha	
54	About the Concept of Educational Software and the Implementation in the	
54.	University Educational System	
	Sorina SERBAN, ALEXA Vasile	357
55.	Enabling DFx Tools Using PLM Software Solutions	
	Nemanja Sremčev, Nikola Suzić, Ilija Ćosić, Zoran Anišić	
56	Design of Electromechanical Positioning System with Sinusoidal Change of Jerk	
50.	Mihaylo Y. Stoychitch	
57.	The Applications of Carbon Fibres and of Compounds Reinforced by Carbon Fibres	
	László Szabó, Lóránt Szabó	378
58.	Vehicle protrusion by compressed air	
	Tamás Szakács, Zoltán Knittlhoffer, Zsolt Piukovics, Dániel Bányácsky	

_	1 <sup>st</sup> Regional Conference - Mechatronics in Practice and Education MECH - CONF 20	11
59.	Challenges of teaching technical English language L. Szedmina, S. Maravić Čisar, I. Fürstner and R. Pinter	395
60.	Fuzzy Logic-based Risk Evaluation of Physiological Processes and the Inherent Uncertainties Edit Tóth-Laufer, István Krómer, Márta Takács	399
61.	Propeller airplane powered by fuel cells Attila Túrú, Gábor Bóbány, Fülöp Bazsó	408
62.	Research Activities in the Intelligent Space Laboratory of the Óbuda University A.R. Várkonyi-Kóczy, I. Nagy, I. Langer, E. Tóth-Laufer	412
63.	<ul> <li>Program Management and Project Management Different Aspects Review</li> <li>- A Case Study in a Pharmaceutical Company -</li> <li>A. Vuković, M. Ikonić, J. Lukeš Vuković, S. Doboviček, A. Kolacio</li> </ul>	423
64.	Mechatronic System in Formula Student Vehicle D. Zorc, T. Štampar, S. Bucal	428

## Adapting Electroencephalogram Data for MATLAB/Simulink

Sándor Csikós\*, József Sárosi\*\*, Roland Elek\*\*\*, István Bíró\*\*\*\*

\* University of Szeged Faculty of Engineering, Szeged, Hungary

\*\* University of Szeged Faculty of Engineering, Szeged, Hungary

\*\*\* University of Szeged Faculty of Science and Informatics, Szeged, Hungary

\*\*\*\* University of Szeged Faculty of Engineering, Szeged, Hungary

#### csikos-s@mk.u-szeged.hu; sarosi@mk.u-szeged.hu; elek.roland@gmail.com; biro-i@mk.u-szeged.hu

Abstract— The purpose of this paper is to explore the possibilities of adapting a live feed of electroencephalogram (EEG) data to the MATLAB programs SIMULINK environment. This is useful for several reasons. First, the SIMULINK environment offers fast and easily configurable data analysis and manipulation. This is a key feature when working with EEG signals since they carry a lot of information as well as noise from the movement of the probes and less than ideal electrical connection with the scalp of the patient. The information we are trying to extract is related to the facial expressions of the subject as well as some cognitive thoughts. In theory, with the right filters and algorithms one can detect a pattern of cognitive thoughts. This can later be used as an input to other devices such as a cursor of a computer, wheelchairs for those with disabilities or movement of artificial appendages. Second, SIMULINK offers tools for the development of such algorithms with the aid of genetic algorithms, neural networks and fuzzy computing. The device with which the EEG signals will be acquired is an Emotiv EPOC, a portable EEG device with 16 probes and 2 gyroscopes.

Keywords: MATLAB, EEG, signal processing

#### INTRODUCTION

T.

The use and development of non-invasive human-computer interfaces is a new and promising area. Research results can be used in a wide range of areas, including rehabilitation of motion-impaired people with limb prostheses that require no special control methods from the user's point of view, but detect and react to the intentions of the user in a natural way. Our goal is developing a prosthesis that accomplishes this goal by using pneumatic artificial muscles as actuators and an electroencephalography-based brain-computer interface as its data source. Electroencephalography (EEG) is the field of measuring, processing, and analysing small electric voltage fluctuations with a frequency between DC and approximately 100 Hz, generated by neurons firing in the brain, which can be measured using electrodes attached to the scalp, commonly known as brainwaves. Patterns in these voltage fluctuations reflect specific activities in the brain. Depending on the number and parameters of sensors used, recognizable activities range from simple emotions (e.g. alertness) to cognitive concepts, such as "left" or "disappear".

The most important property of EEG is its non-invasiveness, which means it is not needed to break the integrity of the human body in any way (e.g. needles) to use the technique. Multiple types of sensors exist. Most medical devices require a conductive, adhesive substance to attach to the scalp. Other implementations use a headset form factor that supports the sensors in their intended positions, eliminating the need that the conductive substance be adhesive. Some devices also do not need any separate conductive substance for proper operation.

A similar technology to EEG is electromyography (EMG). EMG operates by the same general principle as EEG, and it is generally used to sense and analyse electrical activity of skeletal muscles. Some EMG data can be present in EEG signals, especially activity resulting from ocular and facial muscle actuation in data acquired from sensors close to the forehead, as described in [1], and shown on Fig. 5. This can be used to detect other states of the user, e.g. blinks, direction of looking, and facial expressions.


The aforementioned states of the user are reflected in the spectrum and spatial distribution of electrical fluctuations measured by the sensors. These patterns can be recognized using data classification algorithms.

A good environment to experiment in with different processing and classification methods is vital to obtain the best possible results. We chose Simulink, a part of the well-known MATLAB environment, as it also provides tools to simulate the mechanical system of the prosthesis we are developing.

The concrete EEG device we are using is an EPOC neuroheadset by Emotiv Systems. It is a wireless PC peripheral that features 14 channels, 2 reference electrodes, and a 2-axis (yaw and pitch) gyroscope. Its sensing elements are wet electrodes. This means they have to be moistened with a saline solution to maintain proper electrical contact with the user's scalp, as mentioned in [2]. The positions of the electrodes are in accordance with the international 10-20 system. The EPOC is a commercially available product that is sold with different types of licensing. We chose the Research Edition, because it gives access to raw EEG and gyroscope data. The EPOC set can be seen on Fig. 1. On the left is the hydrator pack for moistening the felt pads of the sensors, which are currently inserted into the hydrator. On the right is the wireless receiver that can be connected to a PC. The next

#### 1st Regional Conference - Mechatronics in Practice and Education MECH - CONF 2011

item from the right is the saline solution used for moistening the felt pads to ensure high contact quality and good electrical conductivity. On the bottom is a standard mini-USB cable for charging the battery of the headset. In the centre is the headset itself.

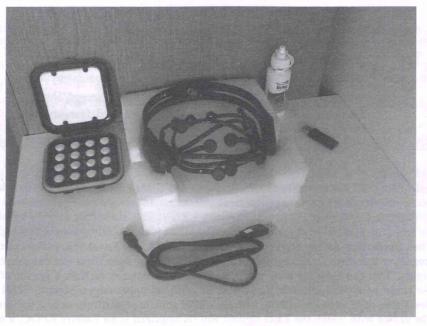

#### Figure 1. The Emotiv EPOC set

The Simulink environment currently lacks support for the EPOC. To be able to conduct real-time experiments, we need to be able to directly import live streams of data from the headset. To this end, we have created two Simulink blocks that accomplish this task. One of these blocks import the 14 EEG channels, and the other adapts the gyroscope data. The latter was created because the method required to acquire gyroscope data from the headset is almost the same as for EEG data, so it was straightforward to implement, and could be used to test the implementation controllably, as head movements are easily reproduced multiple times and provide more predictable output than EEG patterns.

#### II. MATERIAL AND METHODS

Multiple methods exist that enable the use of the collected data in simulations. One of these is recording the data to a file, and then using the file as the data source. A disadvantage of this method is that it permits only offline processing of the data. Another method is using C MEX S-functions. A C MEX S-function is an extension to the MATLAB environment written in the C programming language, which can be used as an optionally multiinput, multi-output system in Simulink. The Emotiv EPOC Research Edition Software Development Kit (SDK) provides ANSI C libraries to facilitate communication with the headset. A C MEX S-function, being a C program, can thus access the data provided by the SDK, and make it available on its output ports in Simulink. As mentioned above, two Simulink blocks were created this way, one for gyroscope data, and one for the 14 EEG channels. These two blocks can be seen on Fig. 2. 1<sup>st</sup> Regional Conference - Mechatronics in Practice and Education MECH - CONF 2011

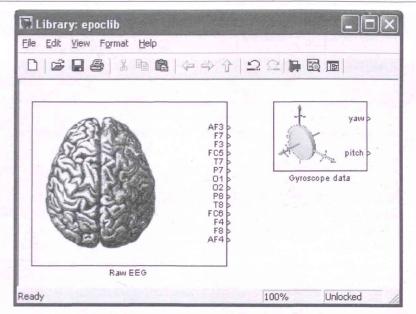


Figure 2. The Simulink blocks for EEG and gyroscope data

The process of reading live data from the headset can be divided into three distinct major stages: initialization. acquisition, and clean-up. The first task of the initialization stage is to establish a connection to the Emotiv headset software called the EmoEngine. The available headsets are then discovered. The next step is to set up buffers for data acquisition, and to start the process itself. In the acquisition stage, measurements are taken periodically, and the results are stored in an internal data buffer in EmoEngine. This buffer must be read to a local buffer at a rate that does not permit the buffer in EmoEngine to overflow. As our Simulink block always reads the whole EmoEngine data buffer, and the smallest local buffer that can be set up holds one second of data, an overflow condition is theoretically possible only if the sampling time is longer than one second. The outputs of the aforementioned Simulink blocks can be updated from the local buffer. In the clean-up stage, which in the case of Simulink blocks, is executed on stopping the simulation, first the data acquisition is disabled using an explicit function call. The local buffers are then freed. As a last step, the clean-up stage closes the connection to EmoEngine. For testing purposes, we visualized EEG channels F3 and F7 on a scope in real time. As the raw signal acquired from the headset (Fig. 3) is discrete-valued and discrete-time, there are sharp jumps on the original graph of the channels at time values that are multiples of the sampling time. This can be solved by using a lowpass filter on the data. On Fig. 5, the signals were filtered using low-pass filters with a cut-off frequency of 20 Hz. Real-time operation was achieved using a third-party extension called RTBlock, shown on Fig. 4. The artefacts circled in red on Fig. 5 are electromyographic signals denoting blinks. The yellow graph corresponds to channel F3, and the purple one to F7.

-

[	T	1	1	T
inspersession and	mater and in the	and wide	Contraction of the	and the second
wanteranter	mitminiano			
wiggsprogramenter and	molendesinappe	e-chorale Mary Jahan	and many and the second	gronder and
wasser out	man for management	- marker	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	man
Jayahand fotatayana tana tana tana tana tana tana t	wandshermanner	- tother on attended the	a manager and and a post	angerenanger
NW PHANNA	en demonstration	annoration and a state of the	adjuited	entrologiantes
al a deployed and a solution of	o and from the most of the	narring a sun synameter of the ser	and a stand and a stand	www.come.co
hallphanenananan	equilibration of the	munanderpa	mapagensyddommanau	manpolation
happing the manufa	pullinations	orans. Ashebili part har	andiphatisesona	diagontin
hadrolant manager	and providence of the	normalise mandles	anananan anananan	man graphily is
	monortheast			
hard a construction of	- Annau mar		an a	mansin
Algertineservices	modulation places	annow young	and all the state of the state	an appropriate
Marinementer	materialismitus	and the start	martin water water	yungiyalqu
and the state of the	i	i i i i i i i i i i i i i i i i i i i		1

Figure 3. Raw signals acquired from the headset



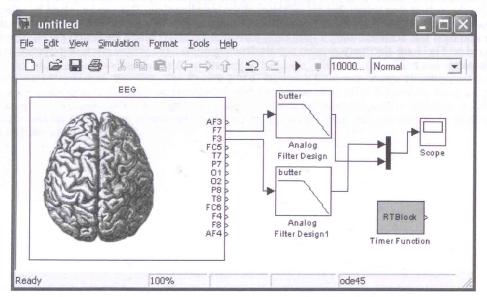


Figure 4. Simulink model for experimenting on filtering

1<sup>st</sup> Regional Conference - Mechatronics in Practice and Education MECH - CONF 2011

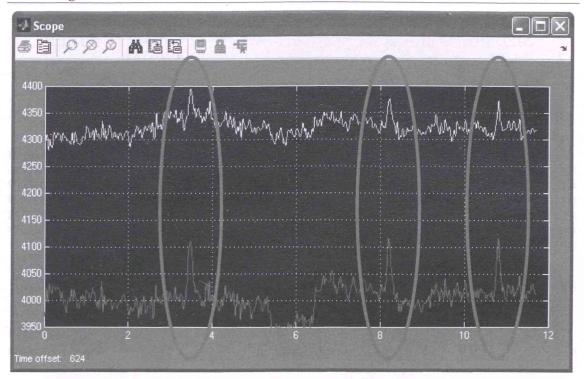



Having imported the signals, it is possible to experiment with various signal processing and data classification tools. For example, as relevant information is carried by the spectrum and spatial distribution of the signals, it is useful to carry out frequency domain analysis on the data. Simulink provides various tools to support this, such as Fourier and wavelet transforms, filters, and other signal processing blocks.

For our task of controlling a prosthetic limb, a major challenge is to reliably detect signatures of the user's cognitive intentions in the data. Multiple present EEG-based brain-computer interfaces, such as the ones described in [3] and [4], utilize a type of supervised learning classifier to accomplish this. There has been research on using neural networks to classify the EEG data, which shows promising results, described in [5]. A selection of other options is presented in [6].

#### CONCLUSION

In this paper, we described the method of importing live EEG data to the Simulink environment, and discussed the possible approaches to using them as a data source for controlling a pneumatic artificial muscle actuated limb prosthesis. It was also stated that, besides experimenting with signal processing and data classification methods, it is possible to simulate the mechanical hardware of the prosthesis, and control the simulated hardware with the outputs of the classifier, making it possible to test the whole system in a virtual environment, facilitating changes, and accelerating research.

#### REFERENCES

- [1] Carrie A. Joyce, Irina F. Gorodnitsky, Marta Kutas: "Automatic removal of eye movement and blink artifacts from EEG data using blind component separation". March 2004, *Psychophysiology*, Vol. 41., No. 2., pp. 313-325.
- [2] Emotiv BETA EPOC Hardware Setup, available as part of the electronic download of the Emotiv SDK.
- [3] K.-R. Müller, M. Krauledat, G. Dornhege, G. Curio, and B. Blankertz: "Machine learning techniques for brain-computer interfaces," 2004, *Biomedizinische Technik*, Vol. 49., No. 1., pp. 11-22.
- [4] Palaniappan, R.; Paramesran, R.; Nishida, S.; Saiwaki, N.: "A new brain-computer interface design using fuzzy ARTMAP," January 2003, *IEEE Transactions on Neural Systems and Rehabilitation Engineering*, Vol. 10., No. 3., pp. 140-148.
- [5] Haselsteiner, E.; Pfurtscheller, G.: "Using time-dependent neural networks for EEG classification," December 2000, *IEEE Transactions on Rehabilitation Engineering*, Vol. 8., No. 4., pp. 457-463.
- [6] F. Lotte, M. Congedo, A. Lécuyer, F. Lamarche and B. Arnaldi: "A review of classification algorithms for EEG-based brain-computer interfaces," January 2007, *Journal of Neural Engineering*, Vol. 4., No. 2., pp. R1-R13.