



V TEHNIČKI VJESNIK

TECHNICAL GAZETTE

The Eiffel Tower, La Tour Eiffel

in French, was the main exhibit of the Paris Exposition - or World's Fair - of 1889. It was constructed to commemorate the centennial of the French Revolution and to demonstrate France's industrial prowess to the world. When Gustave Eiffel's company built Paris' most recognizable monument for the 1889 World's Fair, many regarded the massive iron structure with skepticism. "Although at the beginning it was seen as 'the ugliest building in Paris,' soon it became the symbol of the city," said Tea Gudek Snajdar, an Amsterdam-based art historian, museum docent and a blogger at Culture Tourist. Today, the Eiffel Tower, which continues to serve an important role in television and radio broadcasts, is considered an architectural wonder and attracts more visitors than any other paid tourist attraction in the world.

Key figures for an epic

The four pillars of the Eiffel Tower stand in a square that measures 125 meters on each side. They are oriented in line with the 4 cardinal points.


The metal structure weighs 7,300 tons.

Total weight: 10,100 tons.

Number of rivets used: 2,500,000.

Number of iron parts: 18,038.

Cost of construction: 7,799,401.31 French gold francs of 1889.

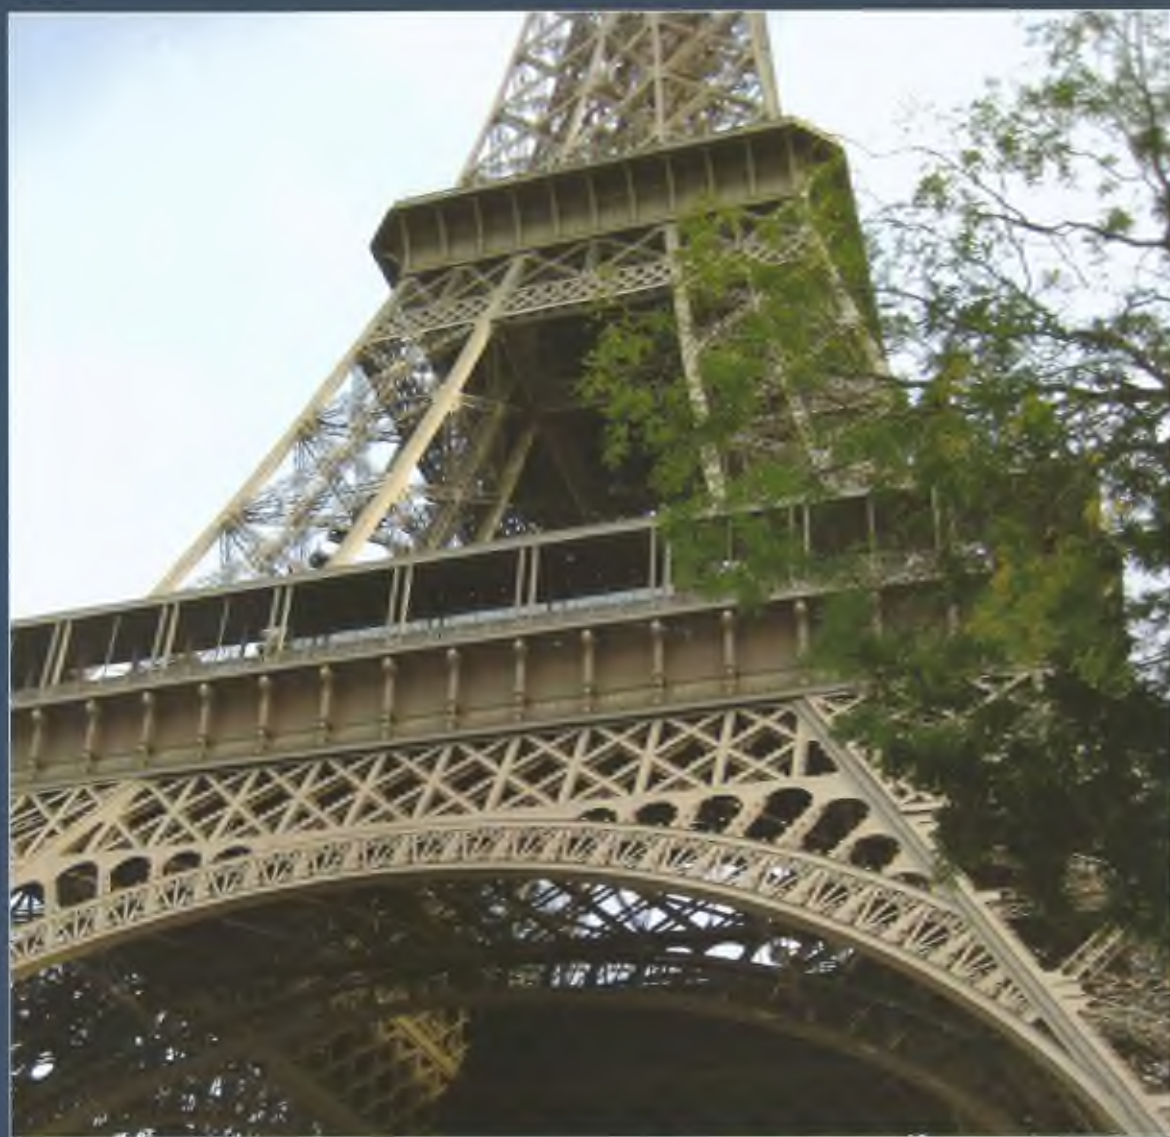

(See more inside of the Journal)

rujan, 2018.

September, 2018

Slavonski Brod, Croatia

Broj (Number) Supplement 2

Godište (Volume) 25

Stranica (Pages) 241-532

TEHNIČKI VJESNIK TECHNICAL GAZETTE

Znanstveno-stručni časopis tehničkih fakulteta Sveučilišta Josipa Jurja Strossmayera u Osijeku
Scientific professional journal of technical faculties of the Josip Juraj Strossmayer University of Osijek

Godiste (Volume) 25

Slavonski Brod, rujan (September) 2018.

Broj (Number) Supplement 2

Teh. vjesn.

Stranica (Pages) 241-532

Address of Editorial Office:

Strojarski fakultet - Tehnički vjesnik
Trg Ivane Brlic-Mazuranic 2
HR-35000 Slavonski Brod, Croatia
Tel.: +385 35 493 423, faks: +385 35 446 446
e-mail: lehnvj@sfsb.hr, technical.gazette@gmail.com
http://www.tehnicki-vjesnik.com
http://hrcak.srce.hr/lehnicki-vjesnik

Publishers:

Technical faculties of the Josip Juraj Strossmayer University of Osijek (UNIOS):
Mechanical Engineering Faculty in Slavonski Brod (MEFSB) (Strojarski fakultet
u Slavonskom Brodu); Faculty of Electrical Engineering Osijek (FEEOS)
(Elektrotehnički fakultet Osijek) and Faculty of Civil Engineering Osijek (FCEOS)
(Građevinski fakultet Osijek)

Supporting institution:

Polytechnic of Slavonski Brod (PSB) (Veleučilište u Slavonskom Brodu)

Council of Journal:

Damir VAREVAC (FCEOS), Chairman; Drago ŽAGAR (FEEOS), Member;
Ivan SAMARDŽIĆ (MEFSB), Member; Dražan KOZAK (Vice-Rector for
Education and Students of UNIOS), Member

Editorial Board:

Pero RAOS (MEFSB, Editor-in-Chief), Milan KLJAJIN (MEFSB, Vice Editor-in-
Chief and Technical Editor), Ivana BARISIC (FCEOS, Member), Marijana
HADŽIMA-NYARKO (FCEOS, Member), Željko IVANDIĆ (MEFSB, Member),
Dražan KOZAK (MEFSB, Member), Goran MARTINOVIC (FEEOS, Member),
Srele NIKOLOVSKI (FEEOS, Member), Snježana RIMAC-DRLJE (FEEOS,
Member), Antun STOIC (MEFSB, Member), Tomislav SARIC (MEFSB,
Member), Goran SIMUNOVIC (MEFSB, Member), Marija SPERAC (FCEOS,
Member)

International Editorial Council:

Eduard BABULAK (Fort Hays State University, KS, USA), Karoly BELINA
(GAMF Kecskemet, Hungary); Jozef DUHOVNIK (University of Ljubljana,
Slovenia); Matej FISCHINGER (University of Ljubljana, Slovenia); Nenad
GUBELJAK (University of Maribor, Slovenia); Nenad GUCUNSKI (Member
ASCE, Department of Civil and Environmental Engineering at Rutgers University
in Piscataway, NJ, USA); Patrick HAMILTON (Switzerland); Sergej HLOCH (TU
Košice, Slovakia); Christian HOPMANN (Institute for Polymer Processing in
Industry and Skilled Crafts at RWTH Aachen University, Germany); Janez
KOPAC (University of Ljubljana, Slovenia); Grzegorz KROLCZYK (Opole
University of Technology, Poland); Sanjay MISRA (Covenant University, OTA,
Nigeria / Atılım University, Ankara, Turkey); Helmut RAPP (Universität der
Bundeswehr München, Germany); Aleksandar SEDMAK (University of
Belgrade, Serbia); Hakan TOZAN (Istanbul Medipol University, Turkey);
Jaganathan VENKATESH (Anna University, Tamilnadu, India); Djordje VUKELIC
(University of Novi Sad, Serbia)

Council of Experts:

Ivica DŽEBA (Faculty of Civil Engineering in Zagreb, Croatia); Tomislav FILETIN
(Faculty of Mechanical Engineering and Naval Architecture in Zagreb, Croatia);
Marijan RAJSMAN (Faculty of Transport and Traffic Sciences in Zagreb,
Croatia); Mladen SERČER (Faculty of Mechanical Engineering and Naval
Architecture in Zagreb, Croatia); Božo UDOVIČIĆ, Academic (HAZU Zagreb,
Croatia)

Editor-in-Chief: Pero RAOS (MEFSB)**Technical Editor:** Milan KLJAJIN (MEFSB)**Linguistic Advisers and Translators:**

Jasna AZMAN (Croatian language)(MEFSB)
Silva SETINA (English language)(Slavonski Brod)

Computer Typesetting and Screen Break:

Intes, 35000 Slavonski Brod, Nas. Slavonska 2-6/3
tel /faks: +385 35 447 426; info@intes.hr

Print:

Grafika d.o.o., 31000 Osijek, Strossmayerova 295
tel.: +385 31 310 300, fax: +385 31 310 303

All papers published in journal have been reviewed.

Journal published bimonthly.

(From No. 1, Vol. 20, January – February, 2013)

Circulation: 500 issues

Journal is referred in (Abstracting and Indexing):

Science Citation Index Expanded (Web of Science/Clarivate Analytics) and
Journal Citation Reports/Science Edition (from January, 2008); SCOPUS;
INSPEC; COMPENDEX: Ei-Compendex; Geo Abstracts (Civil Engineering,
Process Engineering and FLUIDEX) (DIALOG, ESA/IRS); Cambridge Scientific
Abstracts (CSA: Metals Abstracts/METADEX, Engineering Materials Abstracts,
Ceramic Abstracts, Corrosion Abstracts, and Materials Business FileSteel
Alerts); Elsevier Biobase, Elsevier GeoAbstracts; PaperChem; EMBASE

Annual Subscription:

For Croatia 1080 kn (single copy 180 kn) + 5 % (PDV)
For abroad 300 EUR (single copy 50 EUR) + 5 % (VAT)

Subscriptions Receives:

Strojarski fakultet - Tehnički vjesnik
Trg Ivane Brlic-Mazuranic 2
HR-35000 Slavonski Brod, Croatia
Tel.: +385 35 446 188, faks: +385 35 446 446
E-mail: lehnvj@sfsb.hr, technical.gazette@gmail.com

Payment:

Payment should be transferred to the following:
Bank: Privredna banka Zagreb d.d., HR-10000 Zagreb, Račkog 6, Croatia

For international bank transfer please use

IBAN: HR8923400091100171075
SWIFT CODE: PBZGHR2X

For domestic bank transfer please use

IBAN: HR8923400091100171075, model 00, poziv na broj članka

User (IBAN holder):

Strojarski fakultet, Sveučilište J. J. Strossmayera u Osijeku, HR-35000
Slavonski Brod, Croatia

Price of Advertisements:

B&W printing: 1/4 page - 150 EUR; 1/2 page - 300 EUR and 1/1 page - 600
EUR. For colour printing is required to make extra arrangements.

Manuscripts are not returned.

Registration of Journal:

According to the Article 58 of the Law on Public Information ("Official
Gazette/Narodne novine" No. 22/1992), the Journal is registered on the 27th
October 1993 under number 468. The Journal is printing partly by financial support
of the Ministry of Science and Education of the Croatian.

Clarivate Analytics 2017 Journal Citation Reports (JCR): IF 0,686

Preparation Ended: 2018-09-21



Contents

	Foreword	III
Original scientific paper	Saravanan CHANDRASEKARAN, Vijay Bhanu SRINIVASAN, Latha PARTHIBAN Towards an Effective QoS Prediction of Web Services using Context-Aware Dynamic Bayesian Network Model	241
	Janos SIMON, Imre PETKOVIC, Djerdji PETKOVIC, Ármin PETKOVICS Navigation and Applicability of Hexa Rotor Drones in Greenhouse Environment	249
	M. A. K. CHOWDHURY, Ateekh Ur REHMAN, M. S. UDDIN, Mohammed ALKAHTANI, Saqib ANWAR Multi Criteria Optimization Approach for Dressing of Vitrified Grinding Wheel	256
	Zoran MISKOVIC, Saad AL-WAZNI, Ahmed ALALIKHAN Damage Detection for Civil Structural Health Monitoring Application - A Case Study of the Steel Grid Bridge Structural Model	266
	Katarzyna ANTOSZ, Andrzej PACANA Comparative Analysis of the Implementation of the SMED Method on Selected Production Stands	276
	Branimir RONCEVIC, Ante BAKIC, Janos KODVANJ Numerical Receding Contact Analysis of a Perfect-Fit Pin and Bushing in a Loaded Plate	283
	Mirko BLAGOJEVIC, Milos MATEJIC, Nenad KOSTIC Dynamic Behaviour of a Two-Stage Cycloidal Speed Reducer of a New Design Concept	291
	Pawel PAWLUS, Andrzej DZIERWA Wear Analysis of Discs and Balls on a Micro-Scale	299
	Mehmet DIREK, Mehmet Selçuk MERT Comparative and Exergetic Study of a Gas Turbine System with Inlet Air Cooling	306
	Robert SMUSZ, Tomasz TRZEPICINSKI, Tomasz MALINOWSKI, Tomasz PIEJA Experimental Investigations of Induction Heating in Warm Forming of Stainless Steel Sheets	312
	Dennis JANKOVICH, Kresimir OSMAN, Vili MILKOVIC A New Methodology for the Temperature Testing of Thermostatic Chambers Used in the Food-Meat Industry	319
	Nikolaj VISNIAKOV, Gediminas MIKALAUSKAS, Raimonda LUKAUSKAITE, Jelena SKAMAT, Olegas CERNASEJUS, Vitalij NOVICKIJ Feasibility Evaluation of Cu-Nb Microcomposite Joints Formed by Magnetic Field Pressing for Pulsed Power Applications	326
	Wissam ALJANABI, Mehmet ALBAYRAK Design and Implementation 4-Bit Quaternary MVL Arithmetic and Logic Unit	330
	Aleksandra JURISIC SKEVIN, Nenad FILIPOVIC, Nikola MIJAILOVIC, Ana DIVJAK, Jasmin NURKOVIC, Radivoje RADAKOVIC, Marija GACIC, Vesna GRBOVIC Gait Analysis using Wearable Sensors with Multiple Sclerosis Patients	339
	Aygenur ERDIL An Overview of Sustainability of Transportation Systems: A Quality Oriented Approach	343
	Mario PERIC, Tomislav PLAŠIĆ, Igor KUZLE New Approach for Stochastic Modelling of Microgrid Containing CHP	354
	Barbara KARLEUSA, Josip RUBINIC, Maja RADISIC, Nino KRVAVICA Analysis of Climate Change Impact on Water Supply in Northern Istria (Croatia)	366
	Marko Z. EKMEDZIC, Aleksandar BENGIN, Boško RASUO Conceptual Design and Flight Envelopes of a Light Aircraft for Mars Atmosphere	375
	Martin VASINA, Lumír HRUŽÍK, Adam BUREČEK Energy and Dynamic Properties of Hydraulic Systems	382
	Ali Payidar AKGUNGOR, Ersin KORKMAZ Investigating Parameter Interactions with the Factorial Design Method: Webster's Optimal Cycle Length Model	391
	Jelena COSIC LESICAR, Tomislav RADISIC, Tino BUCAK, Josip STEPANIC Static Sensitivity of the Aerial Load Transport by Two Rotocopter Unmanned Aerial Vehicles	396
	Jelena BOROCKI, Mladen RADISIC, Ivan STEFANIC SPACE Analysis as a Tool for Internal Development Factors Measurement within Companies	404
	Hakan TOZAN, Murat KARATAS, Ozalp VAYVAY Reducing Demand Signal Variability via a Quantitative Fuzzy Grey Regression Approach	411

Navigation and Applicability of Hexa Rotor Drones in Greenhouse Environment

János SIMON, Imre PETKOVIC, Djerdji PETKOVIC, Ármin PETKOVICS

Abstract: The paper discusses use-cases and a broad description of application possibilities of drones in greenhouses. Unmanned autonomous aerial vehicles (UAV), i.e. drones, are being used increasingly often for the direct or indirect collection of data. GPS navigation cannot be applied in an indoor work environment. One of the alternatives is to measure the distance from a fixed set of sensors with known positions. The paper presents a dynamic model for a hexa-rotor drone. In order to ensure reliable navigation a new navigation algorithm is presented based on the two-dimensional navigation algorithm of the robot motion control. It demonstrates the development of a three-dimensional navigation algorithm for the hexa-rotor drone with the hypothesis that the elaborate three-dimensional model can navigate the drone in an indoor environment. To prove the hypothesis, the simulation is implemented in Scilab environment with information about the flight path deviation from the planned routes, which is also given in the work.

Keywords: dynamic model; indoor navigation; IoT; unmanned autonomous aerial vehicles

1 INTRODUCTION

Interconnected sensors, capable of data forwarding are a well-known and a widely-used method of large scale data harvesting. These widely deployed sensors are often related to the concept of IoT (Internet of Things). Numerous electronic devices around us (fridges, cctv-cameras in and around our houses, thermometers and other, smart-home equipment) have inbuilt sensors and are often used as environmental sensing entities. However, their utilization is low as they are fixed sensors: they could be active only for small fractions of time. To grow the sensors' utilization one can make them move. But how?

The phenomena where the sensors are attached to the human body and move with it across the day (smartphones primarily) is called crowdsensing and it is largely used in Smart City-related applications lately [30]. However, smartphones have a limited and changing variety of sensors from model to model, so they are often unsuitable for several kinds of sensing tasks [1].

The other possible way to grow the sensors' utilization by moving them to the places of interest is to fly them to the spot with drones. The application of drones opens new possibilities in data collection, specifically in two areas. On the one hand, this is an alternative for sensors and other specific apparatus to be mounted on a drone that will make control flights (patrolling) over the crops in order to record the conditions and store the data. On the other hand, a drone can also be used for taking flights over the crops in order to communicate with each IoT device individually and collect data from them.

In cases where GPS navigation is not possible, or when it is not advisable to rely on, only distance measurement-based navigation technique is suitable. This method is also preferable from the viewpoint of energy saving and the low cost of hardware elements to be deployed [19]. With this technology distance measurements are done to the fixed static sensors to calculate the actual position of the drones in the space where they are operating.

There are surprisingly many drone-surveillance tasks where GPS could not be used. Below, we discuss these, agricultural-related use-cases to further motivate the development of a suitable indoor-navigation algorithm for hexa-rotor drones.

1.1 Application of Drones in Agriculture

Supervising the growth of the sown crops and detection of diseases and pests are integral parts of the crop's life cycle. Soil preparation for plant cultures includes melioration, fertilizing, i.e. adding natural or artificial nutrients, so as to assure greater fertility and larger yields. The additional nutritional treatment of plants continues into the vegetation period, and if necessary, is complemented with chemical substances for disease and pest control. The determination of the type and amount of chemical substances needed, as well as the timing of spraying is based on regular supervision of crop growth. Most commonly observed factors are air and soil temperature and moisture, weather forecast, extrapolation of data on geographical spreading of the diseases and pest movement, etc. There is an evident need for human labour (experts, qualified and unqualified labour) to handle these tasks, though the cost of labour is increasingly weighing down agricultural businesses. The correct response to these issues is the application of mechanization and automation, leading to a decrease of costs. The latest technology and technical achievements in agriculture, and also in information-communication technologies offer further cost-cutting models, and eventually reduced expenses for agricultural business subjects. Crop growth control and disease and pest detection can be achieved (as mentioned above) with the help of IoT sensors that are interconnected and attached to the Internet.

The situation in green houses is similar to the general situation of farming, though, with some specific characteristics regarding the application of agricultural and information-communication methods and technologies. For the surveillance and tracing crop development in a closed space using a drone, the navigation is only possible based on communication between the drone and the mounted static sensors. As far as the application in greenhouses is concerned, one may also use light drones that cause less air turbulence. This, however, also limits the drone's payload weight during flight, as well as its flight range, and also directly influencing the possible flight time.

It is possible to carry out measurements using drones for the parameters of the following areas [14]:

- Soil (measuring soil moisture and temperature, drainage evaluation, detection and tracking weeds, estimation and determination of area to be sprayed with herbicides, as well as the chemical's composition and concentration, detection of pests in soil, estimation and determination of area for type, composition and concentration of pesticides to be used)
- Plants (detection of plant phenology, tracking of plant growth in its life cycle, evaluation of the sowing, i.e. germination, possible replanting requirements, fruit status, phases of fruit growing, fruit counting, yield estimation, detecting lack of nutrients (fertilizer) and microelements based on leaf discoloration, estimation of condition and determination of area where fertilizers are to be implemented, the precise type, composition and concentration according to the given needs, detection and tracking of plant diseases, estimation of condition and determination of area where pesticides are to be sprayed, precise type, composition and concentration of pesticides according to the needs, detection and tracking of pests based on leaf discoloration and damage to leaves -estimation of condition and determination of area where insecticides are to be sprayed, the precise type, composition and concentration of insecticides)
- Air (measuring temperature, pressure and air moisture, pollen, spores, dust concentration as well as methane and CO₂ concentration)

The benefits of drone implementation can be classified into the following groups:

- Speed of executing measurements/time required for measuring and data collection,
- Time required for data preparation for processing,
- Precision of measured data,
- Objectivity of measured data,
- Cost of measuring/data collection, and data preparation for processing [18]
- Increase of yield by up to 15%, [15]
- Decrease of costs for fertilizer, nutrients, pesticide, insecticides by up to 40% [16]
- Decrease of environmental pollution.

In this work, the modelling and simulation of a hexa-rotor drone in a virtual indoor scenario are presented. Applying drones in crop development control and protection in greenhouses is almost exclusively possible using navigation on the basis of communication of the drones and static sensors, whose coordinates are fixed and known. Therefore, one can implement algorithms for the three-dimensional determination of the drone's position and orientation. This work aims to show a modern way of collecting data from intelligent sensors using drones. Such a solution may serve as an alternative to the classical approach, i.e., the collection of data from networked intelligent sensors. The future research directions will focus on the investigation of use cases when the proposed alternative works better.

2 RESEARCH BACKGROUND

Navigation of robots relies on highly precise localization. The most well-known localization techniques

rely on the measured distances of the robot from known, fixed points [24]. The most commonly used distance-measurement techniques are:

- 1) Angle of Arrival (AOA),
- 2) Time of Arrival (TOA),
- 3) Time Difference of Arrival (TDOA) and
- 4) Received Signal Strength Indicator (RSSI).

The AOA method requires each mobile robot to have a series of antennas, and the angle of arrival of the transferred signal from static nodes/sensors is measured for each antenna. Distance is calculated accordingly. It is rarely used, because it requires a complex antenna configuration, fixed on the mobile robot itself. The TOA method measures the time of arrival of the signal between the nodes and the mobile robot. This enables the physical distance to be calculated. The TDOA method measures the time difference upon the arrival of the transferred signal from the individual nodes for distance estimation. This technique offers a great level of accuracy. RSSI method calculates the distance from nodes on the basis of the strength of the received signal. This technique is popular and advantageous because it does not require any additional equipment (apparatus, assemblies).

The three globally used localization methods at robot navigation are triangulation, trilateration and multilateration. Triangulation is the technique for the localization of robots in the plane. This geometrical algorithm operates precisely and consistently only if the stationary nodes are adequately positioned and the mobile robot is within the triangle, made up of three active nodes [9]. Trilateration technique can be applied to localize mobile robots not just in the plane (in two dimensions), but also in space (three dimensions). To localize a mobile robot in 2D, it is necessary to use estimated distances from the robot to at least three fixed nodes. For 3D localization, it is necessary to know the distances to at least four stationary nodes [25]. Multilateration is similar to trilateration with a greater number of stationary nodes: for the case of robots, it generally uses six to fifteen nodes [26].

The least average localization error can be achieved by multilateration. The best tradeoff between calculation time and punctuality for this method is when the number of stationary nodes is eight [27].

In the late years, a novel localization technique appeared, employed among others at light-weight Flapping Wing Micro Air Vehicles (FWMAVs). It uses gyroscope, accelerometer and magnetometer for state estimation and altitude control, and barometer for height estimation. These robot types' localization is harder, the major challenge lies in the disturbance of the accelerometer measurements by the flapping motion of the wings. Novel methods had to be found to overcome this. To lower the localization inaccuracies, mechanical damping and flapcycle-based filtering were introduced [28].

At the beginning of this year, a new theory has been published that allows drones to see and measure distances with a single camera. Researchers at TU Delft [29] have found that drones - with an insect-inspired vision strategy -when approaching an object become unstable at a specific distance. Turning the weakness into strength, drones can use the timely detection of the discovered instability to estimate distance from the ground or the target object.

Researchers of the Micro Air Vehicle Laboratory were getting inspiration from flying insects to make even smaller drones able to navigate by themselves.

Some of today's consumer-drones use similar inspiration to estimate their velocity. They have a downward-looking camera which determines the speed, with which the objects are moving through their field of view. This optical flow provides only the ratio between distance and velocity (h/v) but not their values separately. So, the drones designed for indoor use, usually have an additional sonar, which determines the distance to the ground, so the velocity can be calculated accordingly. With the novel technology of Micro Air Vehicle Laboratory, the implementation of the sonar can be left out, so making even smaller drones is becoming possible.

3 DYNAMIC MODELLING OF HEXA-ROTOR DRONE

A dynamic model of drones and the rotational forces of the propellers are presented in Fig. 1. The structure must be quite thin and light, however the body must be rigid. The six rotors are symmetrically installed around the centre of the drone and the sets of two opposite propellers rotate in the same direction as shown in Fig. 2. The propellers' rotation axes are fixed and parallel to each other [11]. These considerations ensure that the only variables for the propellers are velocity and speed.

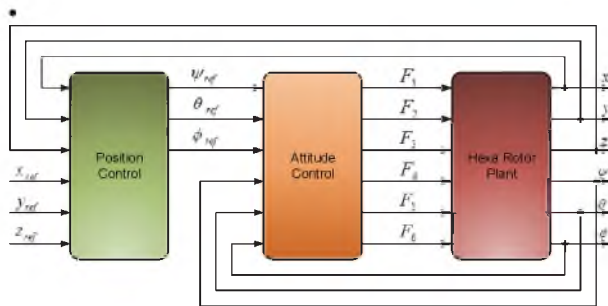


Figure 1 Block diagram of the dynamic model

The drone configuration has six rotors which generate the propeller forces F_p ($p = 1, 2, 3, 4, 5, 6$) as shown in Fig. 2. The control of the drone is achieved by commanding different speeds to different propellers, which, in turn, produces differential aerodynamic forces and moments. In order to increase the altitude of the aircraft, it is necessary to increase the rotor speeds all together by the same amount [4, 6, 13].

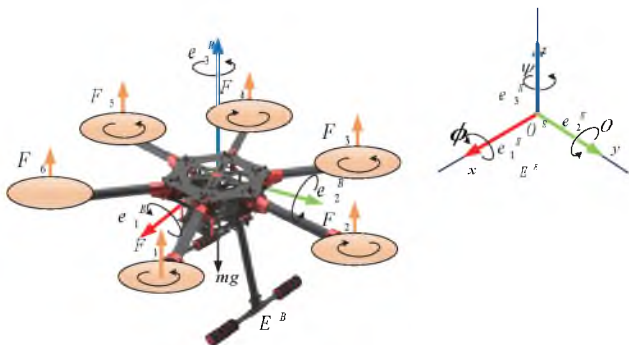


Figure 2 Hexa-rotor drone

Each rotor consists of a brushless DC motor and a fixed-pitch propeller. This drone consists of three rotors which rotate clockwise 1, 3, 5 and three that rotate counterclockwise 2, 4, 6. Forward motion is accomplished by increasing the speed of the rotors 3, 4, 5, while simultaneously reducing the same value for forward rotors 1, 2, 6. For leftward motion the speed of rotors 5 and 6 is increased, while the speed of rotors 2 and 3 is reduced. Backward and rightward motion can be accomplished in a similar fashion. Finally, yaw motion can be performed by accelerating or decelerating the clockwise rotors, depending on the desired angle direction [4, 6, 13].

In order to describe the motion of a six-degrees-of-freedom rigid body, it is usual to define two reference frames:

- the earth inertial frame (E_I), and
- the body-fixed frame (B_I).

The E-frame (O^Exyz) is chosen as the inertial right hand reference. This frame is used to define the linear position and the angular position of the drone, given in meters and radians, respectively. The B-frame is attached to the body. The origin of the B-frame is chosen to coincide with the center of the drone cross structure. This is also a right-hand reference.

The linear position of the drone (X, Y, Z) is determined by the coordinates of the vector between the origin of the B frame and the origin of the E-frame, according to the Eq. (1). The angular position of the drone (Φ, θ, ψ) is defined by the orientation of the E^B -frame with respect to the E^E -frame. This is defined by three consecutive rotations around the main axes, which take the E^E -frame into the E^B -frame. In this paper, the "roll-pitch-yaw" set of Euler angles (Φ, θ, ψ) were used [23].

The vector that describes the drone's position and orientation with respect to the E-frame can be written in the following form:

$$s = [x, y, z, \Phi, \theta, \psi]^T \quad (1)$$

The rotation matrix between the E^E - and E^B -frames takes the following form:

$$R = \begin{bmatrix} c\psi c\theta & c\psi s\theta s\Phi - s\psi c\Phi & c\psi s\theta c\Phi + s\psi s\Phi \\ s\psi c\theta & s\psi s\theta s\Phi + c\psi c\Phi & s\psi s\theta c\Phi - c\psi s\Phi \\ -s\theta & c\theta s\Phi & c\theta c\Phi \end{bmatrix} \quad (2)$$

In order to implement a suitable attitude controller for the drone prototype, an accurate dynamic model needs to be developed [21]. This model is based on certain assumptions, in order to simplify the dynamics of that complex system, so as to be suitable for simulation. The model of drone dynamics can be described by the following system of equations [23]:

$$\ddot{x} = \frac{\left(\sum_{i=1}^4 F_i\right)(c_\phi s_\theta c_\psi + s_\phi s_\psi) - K_x \dot{x}}{m} \quad (3)$$

$$\ddot{y} = \frac{\left(\sum_{i=1}^4 F_i\right)(s_\phi s_\theta c_\psi + c_\phi s_\psi) - K_y \dot{y}}{m} \quad (4)$$

$$\ddot{z} = \frac{\left(\sum_{i=1}^4 F_i\right)(c_\phi c_\psi) - K_z \dot{z} - G}{m} \quad (5)$$

$$\ddot{\psi} = l \frac{(-F_1 + F_2 + F_3 - F_4 + F_5 - F_6 - K_\psi \dot{\psi})}{J_x} \quad (6)$$

$$\ddot{\theta} = l \frac{(-F_1 - F_2 + F_3 + F_4 - F_5 + F_6 - K_\theta \dot{\theta})}{J_y} \quad (7)$$

$$\ddot{\Phi} = l \frac{(-M_1 + M_2 + M_3 - M_4 + M_5 - M_6 - K_\Phi \dot{\Phi})}{J_z} \quad (8)$$

where $c_\phi = \cos(\phi)$, $s = \sin(\phi)$, x, y, z are the coordinates of the drone, ψ is the yaw angle of the drone, θ is the pitch angle of the drone, and ϕ is the roll angle of the drone. F denotes the total force applied to the vehicle, m is the total mass, g denotes the gravitational constant and l represents the length of the arm holding the propeller. J is the drones's diagonal inertia matrix and K is aerodynamic force

constant. The Eqs. (3)-(5) describe the linear acceleration of the vehicle in the direction of the x, y and z axes respectively, while the Eqs. (6)-(8) are nominated for the angular accelerations of the drone.

4 3D NAVIGATION ALGORITHM

This work introduces a new technique for finding indoor 3D location of a drone by using Received Signal Strength Indication (RSSI) [21, 22, 24]. The proposed localization algorithm is derived from multilateration algorithm with composition of empirical path loss model. Fig. 3 presents the developed 3D localization algorithm used by drone indoor navigation [17]. The estimation of X_e, Y_e, Z_e is processed using the algorithm, as depicted in Fig. 3. Values X_i, Y_i denote the node position of the current grid with the maximum averaged RSSI parameter. Thus, the navigational space can be divided into a grid where the nodes represent the border points, which communicate with each other wirelessly, and therefore, the nodes can be used to define which grid that is [2, 8, 12].

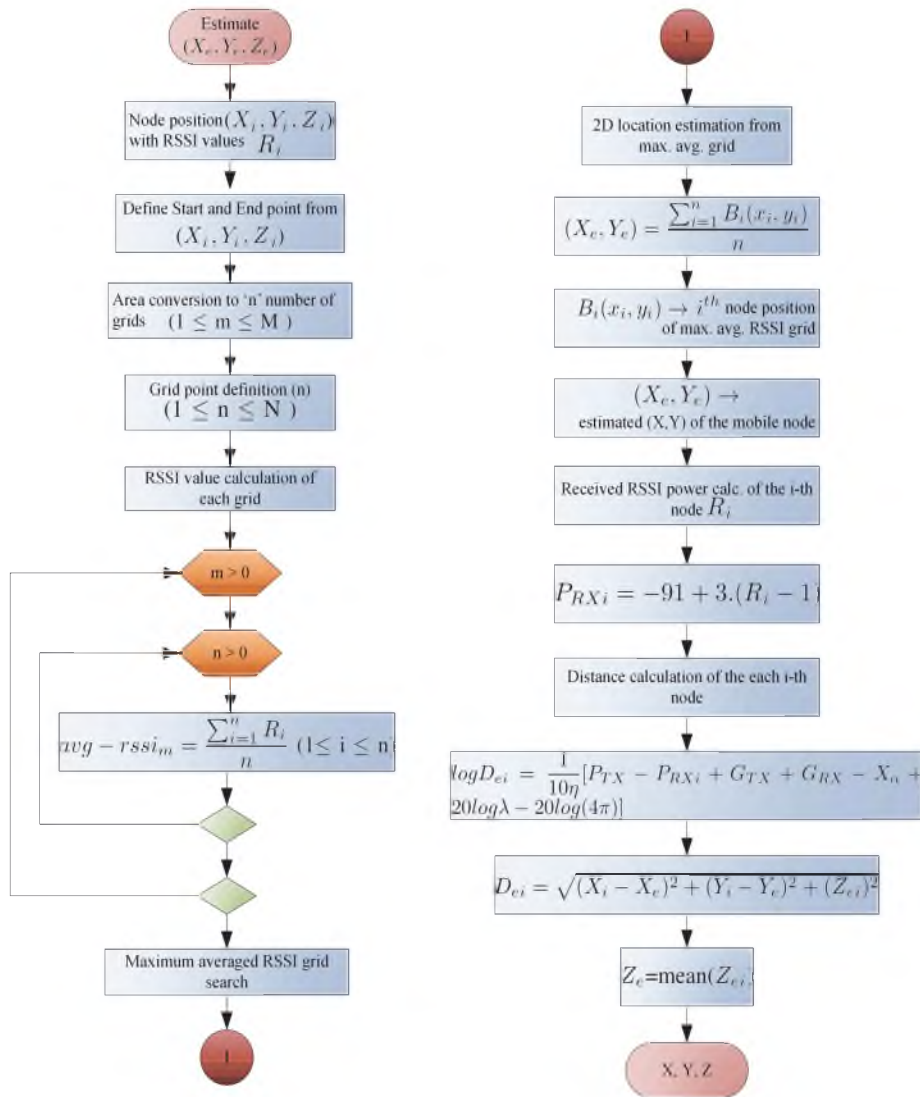


Figure 3 The navigation algorithm

The computation of average RSSI is active while $m > 0$ and $n > 0$. From the maximum averaged RSSI value of the current grid, the 2D location estimation can be done. The calculation of the estimated distance from the received

power indicator can be performed using the standard path loss model. The estimation of the Z_e is done by the calculation of the mean value of all n node positions from the current grid [9].

While the drone is following the defined path in the defined area, a WSN node periodically receives packets from the target node. The WSN node computes the RSSI values and has its position details received from the drone with respect to its 3D movement. The authors used a Zigbee 802.15.4 device with a frequency of 2.4 GHz for wireless communication and to obtain RSSI values. After obtaining the RSSI values and the respective position details from the drone, the device will send a packet consisting of RSSI values and the respective position details through wireless communication to the base node, which is connected to the Server. After receiving the results of the RSSI values with respective position details, the authors used Scilab to analyse the data and apply them to the developed algorithm [9, 31].

The UAV system performance was assessed in Scilab simulation using the drone model, and the actual control algorithms. The system hover and manoeuvring capabilities were tested using a latitude step setpoint. The drone yaw and altitude were assumed constant, being controlled by the drone's internal controller. The position, estimated using template matching, was compared with the drone model position output. The authors took a moving drone with a node and a fixed node set, as shown in Fig. 6.

5 IMPLEMENTATION AND TEST ENVIRONMENT

For the implementation and test environment, a PID controller was selected to provide attitude control for the drone.

$$u(t) = K_p e(t) + K_i \int_0^t e(\tau) d\tau + K_d \frac{de(t)}{dt} \quad (9)$$

where K_p is proportional gain, K_i is integral gain, K_d is derivative gain, and $e(t)$ is defined as the difference between the actual controlled variable value and a desired value. A Scilab/xcos model was built using Scilab 5.5.2 in order to simulate the system's dynamics and response under various conditions, as shown in Fig. 4.

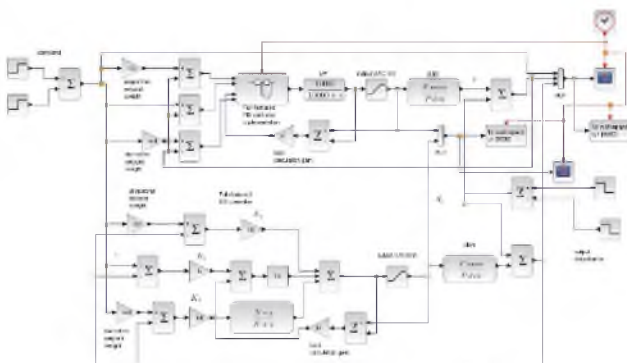


Figure 4 Implemented PID controller block diagram

The implemented PID controller was tested for a step input to the desired altitude, the output is presented in Fig. 5. The plant transfer function is the drone's propeller driven by a DC motor model, where the inertial parameter $J = 10$ and the friction coefficient is $B = 1$. The analysis of the PID feedback control is often performed under the assumption that the system is purely linear. In real devices,

nonlinear elements emerge at certain points in the feedback loop [3, 7, 11].

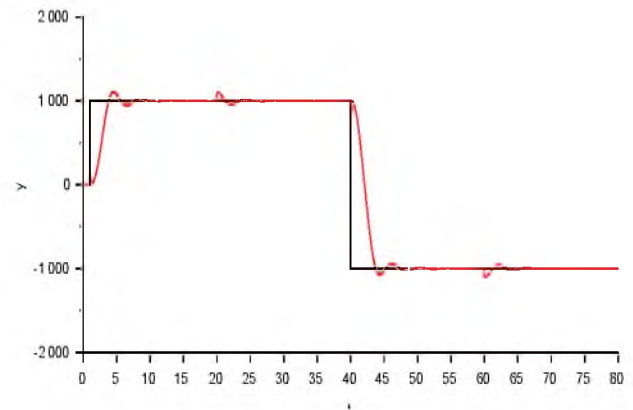


Figure 5 Implemented PID controller output

The system response is considerably fast and has an acceptable overshoot, in addition to a small steady state error.

The node is programmed to give the drone instructions to move via WSN to follow a curved path in a defined area [20]. The obstacle avoidance is solved with the use of range-finder sensors, in order to detect avoidable obstacles within the drone's path. The reflected signals from the range-finder discover the position and distance. Six range-finders are implemented within the system, all aligned within half angles of each other to retrieve a clear position of an obstacle. While the drone is moving in the defined area, WSN node gets packets periodically from target node as shown in Fig. 6. After getting results of RSSI values with respective position, Scilab is used to analyse data and to apply the developed navigation algorithm.

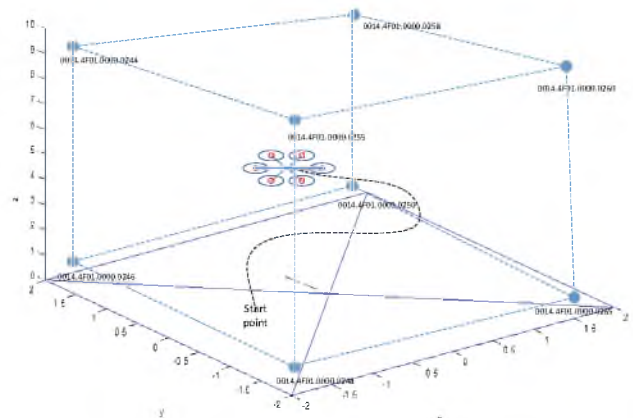


Figure 6 Simulation environment

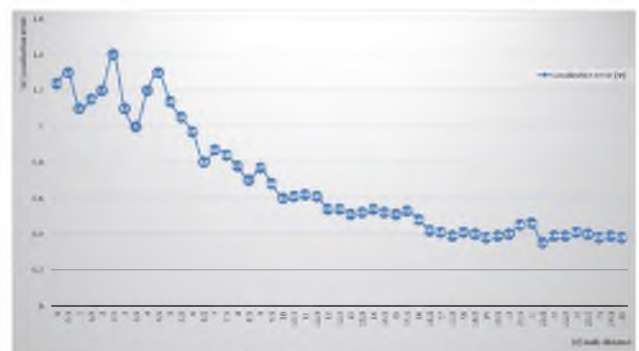


Figure 7 Localization error

Fig. 7 shows the measured localization error within the test environment using the applied navigation algorithm.

The average localization error within the controlled microclimatic environment using the presented algorithm is 0.71 m. Based on the obtained measurement results, the authors have concluded that the optimal method for the localization of the drone within WSN is with eight observable fixed nodes. The experimental results show that the developed algorithm produces quite acceptable error rate of 3D location of target node (<1 meter) in indoor environment. The author's plan is to develop a dynamic algorithm to get still more accurate 3D location of a desired sensor node.

6 CONCLUSION

This paper presents a dynamic model of a hexa-rotor drone, as well as a three-dimensional model of a navigation algorithm for controlling the movement of drones, given that inside the greenhouses they cannot rely on GPS navigation. The quality of the dynamic model and algorithms for navigation was tested in simulation, which was implemented in Scilab environment. The PID controller used here is sufficient and suitable for controlling the behaviour of the hexa-rotor drone. The quality of the models and algorithms for navigation is given by an error-offset value of the controlled variable from the planned value. Apart from the implementation of the navigation algorithm, the performed tests indicated a presence of a research area where methodological and algorithmic improvements are possible in the field of indoor localization with drones using WSNs RSSI parameter without any additional hardware. Experimentation results show that proposed algorithm can estimate target node location with 0.71 meter average estimation error.

7 REFERENCES

- [1] Takács, Á., Nagy, A. D., Rudas, J. I., & Haidegger, T. (2016). Origins of Surgical Robotics: From Space to the Operating Room. *Acta Polytechnica Hungarica, Journal of Applied Sciences*, 13(1), 13-30.
- [2] Martinović, G. & Simon, J. (2014). Greenhouse Microclimatic Environment Controlled by a Mobile Measuring Station. *Journal of the Royal Netherlands Society for Agricultural Sciences*, 70(1), 61-70. <https://doi.org/10.1016/j.njas.2014.05.007>
- [3] Mester, Gy. (1994). Adaptive Force and Position Control of Rigid Link Flexible-Joint Scara Robots. Control and Instrumentation, the 20th Annual Conference of the IEEE Industrial Electronics Society IECON'94, 3, *Proceedings of the International Conference on Industrial Electronics / Bologna*, 1639-1644. <https://doi.org/10.1109/IECON.1994.398059>
- [4] Mester, Gy. (2006). Distance Learning in Robotics. Informatics, Educational Technology and New Media in Education, *Proceedings of the International Conference / Sombor*, 239-245.
- [5] Mester, Gy. (2007). Improving the Mobile Robot Control in Unknown Environments. *YUINFO'2007, Proceedings of the International Conference / Kopaonik*, 1-5.
- [6] Matijevics, I. & Simon, J. (2008). Advantages of Remote Greenhouse Laboratory for Distant Monitoring. *ICoSTAF 2008, Proceedings of the International Conference / Szeged*, 1-5.
- [7] Sárosi, J., Bíró, I., Németh, J., & Cveticanin, L. (2015). Dynamic Modelling of a Pneumatic Muscle Actuator with Two-direction Motion. *Mechanism and Machine Theory*, 85, 25-34. <https://doi.org/10.1016/j.mechmachtheory.2014.11.006>
- [8] Simon, J. & Martinović, G. (2009). Web Based Distant Monitoring and Control for Greenhouse Systems Using the Sun SPOT Modules. *SISY 2009, Proceedings of the International Conference on Intelligent Systems and Informatics / Subotica*, 1-5.
- [9] Simon, J. & Martinović, G. (2013). Navigation of Mobile Robots Using WSN's RSSI Parameter and Potential Field Method. *Acta Polytechnica Hungarica, Journal of Applied Sciences*, 10(4), 107-118.
- [10] Simon, J. (2013). Optimal Microclimatic Control Strategy Using Wireless Sensor Network and Mobile Robot. *Acta Agriculturae Serbica, XVIII*(36), 3-12.
- [11] Simon, J. & Matijevics, I. (2011). Simulation and Implementation of Mobile Measuring Robot Navigation Algorithms in Controlled Microclimatic Environment Using WSN. *SISY 2011, Proceedings of the International Conference on Intelligent Systems and Informatics / Subotica*, 275-279.
- [12] Rajnai, Z. & Ruboczki, E. Sz. (2015). Moving Towards Cloud Security. *Interdisciplinary Description of Complex Systems*, 13(1), 9-14. <https://doi.org/10.7906/index.13.1.2>
- [13] Davenport, H. T. & Lucker, J. (2015). Running on data - Activity trackers and the Internet of Things. *Deloitte Review*, 16, 5-15.
- [14] Ruggiero, J., Vázquez, P., & De Muguerza, E. (2014). Team Drou - MS&E 238: Leading Trends in Information Technology. <http://web.stanford.edu/class/msande238/projects/2014/Drou.pdf>. (Accessed on 22.10.2015)
- [15] Agrárszektor.hu, Nagyön gyorsan terjed ez a csúcstechnika, http://www.agrarszektor.hu/gepek/nagyön_gyorsan_terjed_ez_a_csucstechnika.5492.html. (Accessed on 13.02.2016)
- [16] Agrárszektor.hu, Szédítő gyorsasággal érkeznek a szupertechnikák, http://www.agrarszektor.hu/agrotechnologia/szedito_gyorsasaggal_erkeznek_a_szupertechnikak.5252.html. (Accessed on 13.02.2016)
- [17] Hazel, B. & Aoude, G. (2015). In Commercial Drones, the Race is on, <http://www.oliverwyman.com/insights/publications/2015/apr/in-commercial-drones--the-race-is-on.html#.VtFtZVQrLIU>, (Accessed on 22.10.2015)
- [18] Toscano, M. Connecting the Unmanned Systems Community across the Globe, DronesX Media LLC, <http://www.precisioneverything.com/unmanned/connecting-the-unmanned-systems-community-across-the-globe>, (Accessed on 22.10.2015)
- [19] Flores, G., Zhou, S., Lozano, R., & Castillo, P. (2014). A vision and GPS-based real-time trajectory planning for a MAV in unknown and low-sunlight environments. *Journal of Intelligent & Robotic Systems*, 74(1-2), 59-67. <https://doi.org/10.1007/s10846-013-9975-7>
- [20] Schmid, K., Lutz, P., Tomic, T., Mair, E., & Hirschmüller, H. (2014). Autonomous vision-based micro air vehicle for indoor and outdoor navigation. *Journal of Field Robotics*, 31(4), 537-570. <https://doi.org/10.1002/rob.21506>
- [21] Magree, D., Mooney, J. G., & Johnson, E. N. (2014). Monocular visual mapping for obstacle avoidance on UAVs. *Journal of Intelligent & Robotic Systems*, 74(1-2), 17-26. <https://doi.org/10.1007/s10846-013-9967-7>
- [22] Droschel, D., Nieuwenhuisen, M., Beul, M., Holz, D., Stückler, J., & Behnke, S. (2015). Multi-layered mapping and navigation for autonomous micro aerial vehicles. *Journal of Field Robotics*, 33(4), 1-32.
- [23] Nüchter, A. (2009). *3D Robotic Mapping - The Simultaneous Localization and Mapping Problem with Six Degrees of Freedom*. Springer, Berlin.

- [24] Rong, P. S. (2006). Angle of Arrival Localization for Wireless Sensor Networks. *SECON '06, Proceedings of the International Conference*, Reston, 1-9.
- [25] Meiqian, Y., Tianding, C., & Changhong, Y. (2011). ZigBee-based Positioning and Navigation System for Robot. *Journal of Convergence Information Technology*, 6(1), 135-146. <https://doi.org/10.4156/jcit.vol6.issue1.16>
- [26] Kyungmi, K. & Hyunsook, K. (2011). A Self Localization Scheme with Relay Nodes for Mobile Wireless Sensor Networks. *JNIT*, 2(1), 1-8. <https://doi.org/10.4156/jnit.vol2.issue1.1>
- [27] Simon, J. (2014). Comparison of Different Mobile WSN Node Localization Techniques within the Controlled Microclimatic Environment. *SISY 2014, Proceedings of the International Conference on Intelligent Systems and Informatics*, Subotica, 79-82. <https://doi.org/10.1109/SISY.2014.6923561>
- [28] Verboom, J. L., Tijmons, S., De Wagter, C., Remes, B., Babuska, R., & De Croon, G. C. H. E. (2015). Attitude and Altitude Estimation and Control on board a Flapping Wing Micro Air Vehicle. *ICRA 2015, Proceedings of the IEEE Conference on Robotics and Automation* / Seattle, 1-6. <https://doi.org/10.1109/ICRA.2015.7140017>
- [29] De Croon, G. C. H. E. (2016). Monocular distance estimation with optical flow maneuvers and efference copies: a stability-based strategy. *Bioinspiration & Biomimetics*, 11(1), 1-30. <https://doi.org/10.1088/1748-3190/11/1/016004>
- [30] Petkovics, Á., Simon, V., Gódor, I., & Böröcz, B. (2015). Crowdsensing Solutions in Smart Cities towards a Networked Society. *European Alliance for Innovation (EAI), Endorsed Transactions on Internet of Things*, 1(1), 1-15. <https://doi.org/10.4108/eai.26-10-2015.150600>
- [31] Molnár, Gy. (2014). Modern ICT based teaching and learning support systems and solutions in higher education practice. The 10th International Scientific Conference on Distance Learning in Applied Informatics, *Proceedings of the International Conference* / Praha, 421-430.

Contact information:

János SIMON, Professor Dr.
Subotica Tech – College of Applied Sciences
Marka Oreškovića 16, 24000 Subotica, Serbia
E-mail: simon@vts.su.ac.rs

Imre PETKOVIC, Professor Dr.
Faculty of Economics, University of Novi Sad
Segedinski put 9-11, 24000 Subotica, Serbia
E-mail: peti@ef.uns.ac.rs

Djerdji PETKOVIC, Professor Dr.
Faculty of Economics, University of Novi Sad
Segedinski put 9-11, 24000 Subotica, Serbia
E-mail: pegy@ef.uns.ac.rs

Ármin PETKOVICS, PhD candidate
Budapest University of Technology and Economics,
Department of Networked Systems and Services
Műgyetem rkp. 3., Budapest 1111, Hungary
E-mail: petkovics@hit.bme.hu